

SANY

Quality Changes the World

CHAMPION IN ITS CLASS

RELIABLE.
COST-EFFECTIVE.
PRODUCTIVE.



CONSTRUCTION MACHINERY



COMPACT EXCAVATORS **SY135C**

Engine
ISUZU 4JJ1X
Rated power
78.5 kW / 2000 rpm
Bucket capacity
0.6 m³
Operating weight
14666 kg

SANY

For challenging tasks,
you need a first-class partner

Quality comes from experience. And from new ideas. This is why we combine these two crucial factors at SANY. This is because we are one of the world's leading producers, having sold more than **320 000** excavators in **10 years**. This means that you can always rely on sophisticated products that have been tried and tested in practice. An impressive **5–7 %** of our annual turnover is dedicated to research and development.

320 000
EXCAVATORS SOLD IN
10 YEARS

5–7 %
TURNOVER FOR RESEARCH
AND DEVELOPMENT

Quality Changes the World




SY135C HARD FACTS

Max. bucket digging force
103 kN (ISO)

Max. arm digging force
67 kN (ISO)

Swingspeed
12 rpm

Max. travel speed
5.3 km/h

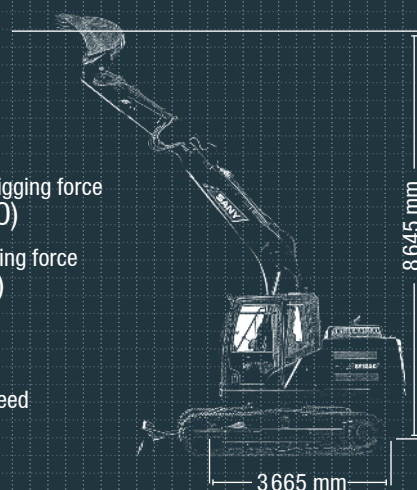



COMPACT EXCAVATOR REDEFINED

Despite its compact design, the SANY SY135C displays impressive versatility and performance. The universal machine impresses when digging, crushing, loading and backfilling. Perfect for use in places where space is limited: In road and canal construction, inner city areas, horticulture and landscaping and demolition work. Its power allows it to reach high excavating forces which would otherwise only

be possible with significantly bigger machines. All that with an astonishingly large operating radius. This saves time, since the machine therefore needs to be moved far less often on the construction site. Talking of movement, the compact dimensions of the machine facilitate easy and safe transport.

TOP PROPERTIES

ECONOMY

STRONG PERFORMANCE WITH LOW FUEL CONSUMPTION

More work with less fuel – the SY135C's sophisticated engine and hydraulic concept makes this a reality. The hugely powerful diesel engine, equipped with common rail technology and AdBlue emission control, puts on a strong show with its maximum torque of 375 Nm and 1 800 rpm. A choice of various operating modes and automatic speed reduction optimise fuel consumption in a tangible way. This is where power meets efficiency. The total savings thanks to improved fuel efficiency result in significant economic benefits.

QUALITY

Quality is worth it – High-quality components improve the machine's durability, while additionally increasing the intervals between each maintenance and service.

DIMENSIONS

Compact power – The SANY SY135C tackles work extremely efficiently as a compact excavator. High performance and impressive stability – the perfect combination to complete all tasks quickly and reliably on the construction site.

USER EXPERIENCE

Easy to maintain – The engine bonnet that can be fully opened and the clear arrangement of the key components in the centre make maintenance and service quick and easy.



SAFETY

Comprehensive protection – In addition to the rotating beacon and the driving alarm, the safety package also includes the fenders above the shield cylinders

COMPONENTS

Reliable drive – The tried-and-tested ISUZU-4JJ1X engine guarantees reliable performance in the long term, even in harsh working conditions.

ECONOMY

Efficiency and power – The smart control system adapts the pump capacity to the available engine power for greater cost-effectiveness and reduced fuel consumption.



SY135C

ECONOMY

Good visibility always guaranteed

Two protected cameras ensure safety is enhanced during all work or when reversing, for example. The resulting camera views are clearly displayed on the high-resolution 7" touch display.



QUALITY

With the benefit of robustness

Durability and robustness are standard features on all SANY excavators. The reinforced structure of the SY135C lends the chassis exemplary stability, thereby prolonging the machine's service life. The top rollers also have double bearings, which significantly improve

durability and the guiding of the chain. What's more, all of the panels are made solely of metal, which makes them particularly resilient and facilitates repair, should there be any obstacles hindering this.



Absolute reliability –

SANY's five-year warranty* gives you the assurance that you can fully count on your equipment.


* With participating partners

COMPONENTS

Flexibility as standard

The full hydraulic arrangement of the quick-coupler system guarantees that functions are perfectly integrated into the control menu, facilitating quick and safe attachment replacement. A further benefit is time and cost savings when compared with retrofitting.

Two proportional, individually adjustable control circuits are, of course, part of the standard equipment on the SY135C. The rotation line is fed by a separate pump to ensure smooth working at all times, even when several movements are being controlled simultaneously.

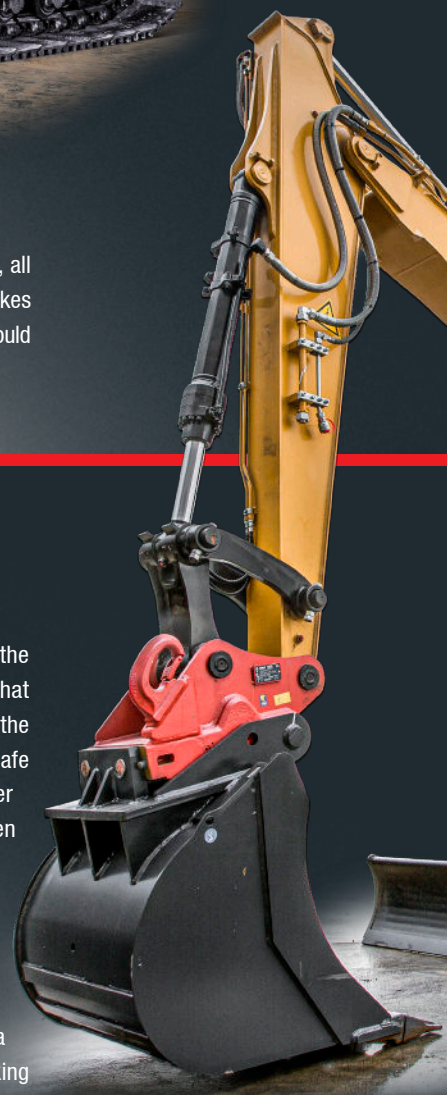

EFFICIENCY, COST-EFFECTIVENESS AND USER EXPERIENCE

USER EXPERIENCE

Control with feeling

The joystick control enables all functions of the excavator to be operated intuitively. The hydraulics valve control responds to commands immediately. Together with the automatic speed setting, this enables work to be carried out precisely and safely with higher efficiency and lower fuel consumption for the same operation. Not forgetting the large 7" touch display, which is easy to read and navigate, and displays all important information.



USER EXPERIENCE

THE PREMIUM CLASS OF OPERATOR COMFORT

A key feature of the SY135C is comprehensive comfort for its drivers. Excellent insulation around the cab provide reliable protection from noise and vibrations, as well as from high and low temperatures. The air-suspension driver's seat, provided as standard, offers the best possible comfort and protection from fatigue with its high seat backrest and various adjustment options. Plenty of space and room for movement, a radio and a 12 V jack, adjustable ventilation, heating and an automatic climate control system, a huge stowage and much more complete the comfort package.



Our highlights – the added benefits SANY offers you:


- + A comfortable driver's cab with numerous extras
- + Robust, wide heavy-duty undercarriage
- + Hydraulic arrangement of the quick-change line system
- + High-resolution colour display
- + High-quality machining thanks to robot-manufactured welded seams
- + Extensive safety equipment
- + LED work lighting



SAFETY

Minimising risks

Ergonomic handrails enable safe access to the maintenance platform. Large mirrors facilitate safe movement during operation, while the integrated safety valves keeps the boom and arm in position, even in the worst-case scenario.

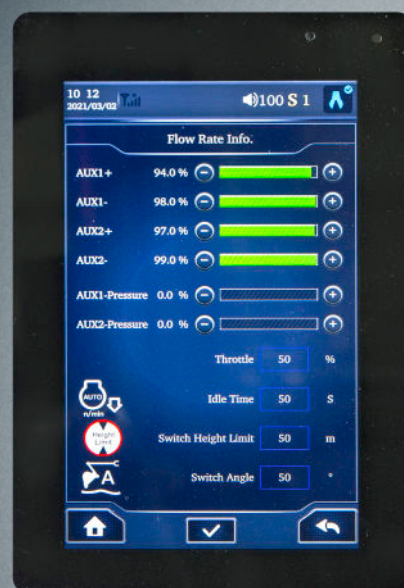

DIMENSIONS

EVERYTHING WITHIN REACH

The SY135C impresses on-site thanks to its stability and stableness, meaning it brings its power quickly and safety to where it is needed. Its large working radius is also a plus point, with a maximum horizontal reach of 8290 mm and maximum excavation depth of 5500 mm. The heavy dozer blade ensures additional stability.



TECHNICAL SPECIFICATIONS

ENGINE

Model	ISUZU 4JJ1X
Type	Water-cooled, 4 cylinder, with commonrail and Adblue
Exhaust emissions	Stage V
Rated power	78.5 kW / 2 000 rpm
Max. torque	375 Nm / 1 600 rpm
Displacement	2 999 ccm
Batteries	2 x 12V / 120 Ah

SERVICE REFILL CAPACITIES

Fuel tank	245 l
Engine coolant	23.6 l
Engine oil	15 l
Drive (per side)	1.8 l
Adblue	20 l
Hydraulic oil tank	140 l

PERFORMANCE

Swingspeed	12 rpm
Max. travel speed	High 5.3 km/h, slow 3.1 km/h
Max. travel force	114 kN
Gradeability	35°
Bucket capacity	0.6 m³
Groundpressure	0.39 kg/cm²
Bucket digging force ISO	103 kN
Arm digging force ISO	67 kN

OPERATING MASS

SY135C*	14 666 kg
*Includes 75 kg (165 lb) operator and full fuel tank and excludes bucket.	

RELIEF VALVE SETTINGS

Implement circuit	343 bar
Swing circuit	250 bar
Travle circuit	343 bar
Pilot pressure	39 bar






























HYDRAULIC SYSTEM

Mainpump	2 x variable-piston-pump with electronic positive control
Max. oilflow	2 x 110 l/min
Travelmotor	2 speed axial piston motor with planetary reducer and automatic multi-disc brake
Swingmotor	Axial piston motor with planetary reducer and automatic holding brake
Max. oilflow (AUX1)	110 l/min
Max. oilflow (AUX2)	40 l/min

UNDER AND UPPER STRUCTURE

Boom length	4 600 mm
Arm length	3 000 mm
Bottomrollers	7
Toprollers	1
Rotation device	Planetary gear reducer driven by an axial piston motor, automatic hydraulic released slewing brake

LIFTING CAPACITIES OF LOWER AND UPPER DOZER BLADE *

Load point heigh		Radius										Digging reach				
		2.0 m		3.0 m		4.0 m		5.0 m		6.0 m		7.0 m		MAX.		Meter
 below																
7.0m	kg	*3323 *3323										*2506	*2506	4.312		
6.0m	kg	*4020 *4020 *3278 3243										*2185	*2185	5.395		
5.0m	kg	*4149 *4149 *3884 3240 *2558 2512										*2041	*2041	6.122		
4.0m	kg	*4697 *4697		*4582	4192	*4083	3180	3282	2498			*1993	*1993	6.324		
3.0m	kg	*6777 5549		5198	4021	4026	3084	3233	2448			*1985	*1985	6.925		
2.0m	kg	6731 5161		5003	3826	3915	2974	3170	2385	*2514	1949	*2039	*1919	7.077		
1.0m	kg	6460 4891		4836	3659	3813	2871	3108	2323	2591	1918	*2184	1889	7.083		
Ground line	kg	6346 4777		4728	3551	3736	2794	3059	2274			*2330	1916	6.942		
-1.0m	kg	*4654	*4654	6317	4748	4676	3499	3693	2751	3078	2293	*2622	2008	6.644		
-2.0m	kg	*7181	*7181	6336	4766	4671	3494	3685	2743	3039	2254	2956	2192	6.167		
-3.0m	kg	*7336	*7336	*5958	4826	4709	3532	*3616	2780			*2973	2541	5.461		
-4.0m	kg	*3774 *3774		*2871	*2871							*2293	*2293	4.414		
 above		2.0 m		3.0 m		4.0 m		5.0 m		6.0 m		7.0 m		MAX.		Meter
																
7.0m	kg	*3323 *3323										*2506	*2506	4.312		
6.0m	kg	*4020 *4020 3278 3243										*2185	*2185	5.395		
5.0m	kg	*4149 *4149 *3884 3240 *2558 2512										*2041	*2041	6.122		
4.0m	kg	*4697 *4697		*4582	4192	*4083	3180	*3758	2498			*1983	*1983	6.324		
3.0m	kg	*6777 5549		*5241	4021	*4415	3084	*3899	2448			*1985	*1985	6.925		
2.0m	kg	*8266 5161		*5947	2826	*4779	2974	*4073	2385	*2514	1949	*2039	1919	7.077		
1.0m	kg	*6624 4891		*6453	3659	*5063	2871	*4204	2323	*2713	1918	*2148	1889	7.083		
Ground line	kg	*6784 4777		*6605	3551	*5168	2794	*4217	2274			*2330	1916	6.942		
-1.0m	kg	*4654	*4654	*8363	4748	*6384	3499	*5029	2751	*4087	2293	*2622	2008	6.644		
-2.0m	kg	*7181	*7181	*7393	4766	*5794	3494	*4574	2743	*3484	2254	*3112	2192	6.167		
-3.0m	kg	*7376	*7336	*5958	4826	*4748	3532	*3616	2780			*2973	2541	5.461		
-4.0m	kg	*3774 *3774		*2871	*2871							*2293	*2293	4.414		


*at 700 mm track pads width

DIMENSIONS (TRANSPORT)

A	Transport length	7500 mm
A'	Transport length (blade)	8850 mm
B	Transport width*	2690 mm
	Transport width**	2590 mm
C	Upperstructure carriage	2490 mm
D	Height over cabin/ROPS	2820 mm
E	Height of Boom – transport	3180 mm
F	Overall length of crawler	3665 mm
G	Tail length	2205 mm
H	Track gauge	1990 mm
I	Undercarriage width (blade)*	2690 mm
	Undercarriage width (blade)**	2590 mm
J	Horizontal distance to blade	2650 mm
K	Blade height	480 mm
L	Track height	815 mm
M	Track pads width	700 mm
		600 mm
N	Min. ground clearance	425 mm
O	Counterweight clearance	910 mm
P	Engine cover height	2130 mm
Q	Tail swing radius	2205 mm
R	Center distance of tumblers	2930 mm


* at 700 mm track pads width

** at 600 mm track pads width

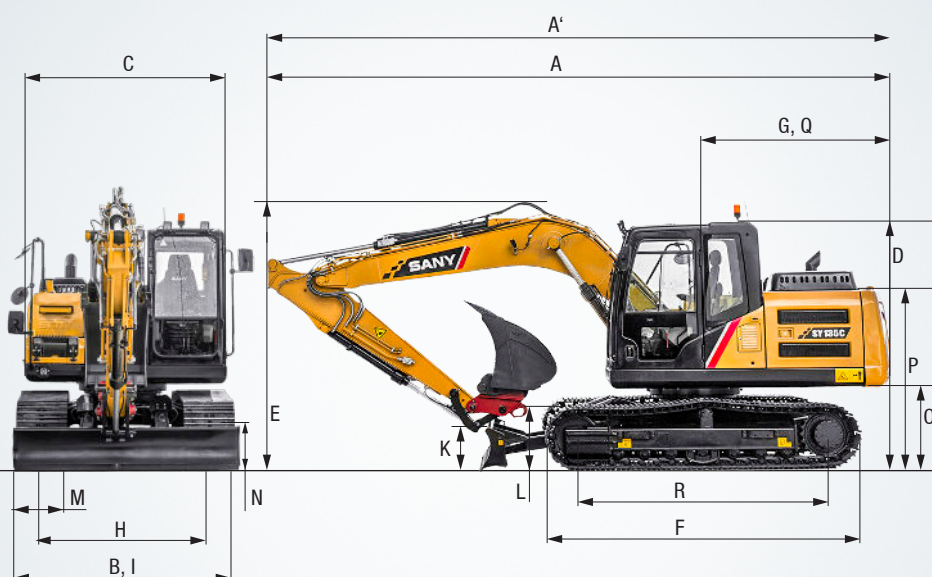

WORKING AREA

A	Max. digging reach	8680 mm
B	Max. digging depth	5970 mm
C	Max. digging height	9040 mm
D	Max. dumping height	6630 mm
E	Min. dumping height	2400 mm
F	Max. vertical digging depth	5350 mm
G	Overall height over arm by min. swing radius	6500 mm
H	Arm head distance with work equipment retracted as far as possible	2610 mm
I	Min. swing radius	2500 mm
J	Max. clearance when blade up	490 mm
K	Max. depth of blade down	320 mm

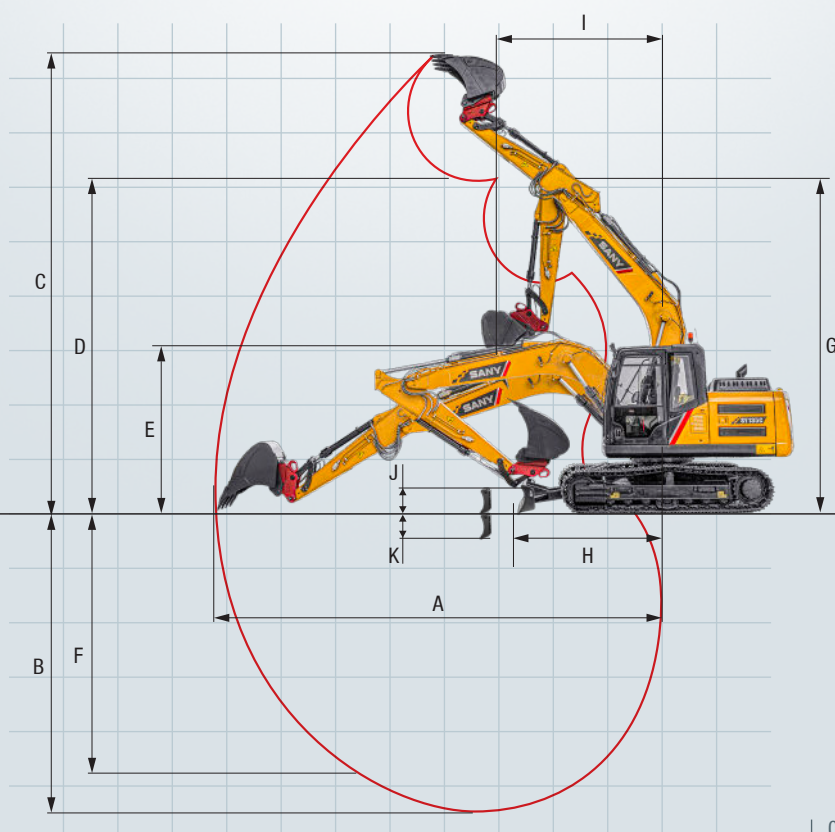



The SY135C – outstandingly well-equipped as standard

Already fitted ex-works with an excellent range of equipment. The SANY SY135C is superbly equipped as standard with optional additional equipment to broaden its scope of possible applications.

OPERATORS COMFORT / CAB

Airsuspension seat	●
Heater	●
Automatic air conditioning C/H*	●
Radio and speaker	●
Armrests (adjustable)	●
12v outlets	●
Wiper	●
Sprayer f. wiper	●
Sky light openable	●
AUX 1 on joystick	●
AUX 2 on joystick	●
Removable front-window	●
Rubberfloor	●

WORKING LIGHTS

Lights – front (LED)	●
Lights – boom (LED)	●
Lights – platform (LED)	●

UNDERCARRIAGE

Steel tracks	●
Cylinder guards-dozer blade	●
Holes/loops for fixing	●

Standard equipment ● Special option ●

The standard and special options differ depending on the country in which the compact excavator is delivered. If you have any questions, please contact your dealer directly.

WORKING EQUIPMENT

Boom and arm load holding valves with overload indicator	●
Double acting circuit for hydraulic quick coupler with piping	●
Breaker & Shear line proportional on joystick with piping	●
Rotation line proportional on joystick with piping	●
Flow adjustable for attachments	●
Without dozer blade	●
Dozer blade	●
Arm 2500 mm	●

SAFETY

Battery master switch	●
Warning beacon	●
Lockable hoods	●
Handrails	●
Lockable fuel cap	●
Rear Camera	●

ENGINE

Auto idle	●
Diesel filter	●

HYDRAULIC SYSTEM

Swing brake	●
2 speed travel	●
Hydr.Pre-pressure operating joysticks	●
Piping for additional hydraulic function AUX 1	●
Piping for additional hydraulic function AUX 2	●
Mainfilter	●

Parts supply – quick and reliable

With the purchase of a SANY compact excavator you have made an investment in the future. Fast availability of spare parts is your guarantee of minimal downtimes and failure times.



A SERVICE YOU CAN RELY ON

Just as we do with our excavators, we also demand high quality and reliability of our service products. This underlines our equipment's performance in terms of their durability and their excellent price-performance ratio. After all, maintenance is crucial

for efficiency, cost-effectiveness and safety. Your SANY dealer is happy to help you with a comprehensive range of services to ensure that your machine continues operating efficiently in the long term.

SANY – flexible, fast and always there for you

Rapid assistance, tailored advice and a reliable supply of original parts – that is what we mean by a premium service.



The added benefits SANY offers you:

- + Experienced dealer network throughout England, Wales, Northern Ireland and Ireland
- + Direct sales and support route in Scotland
- + Dedicated SANY team based in the UK to support you and your product
- + UK office and parts warehouse to ensure SANY excavators are fully supported

* To locate your nearest dealer, visit <https://www.sanyuk.com>.

Detailed information in black and white

Handbooks and documents are available for all SANY compact excavators, and these can help you with operation, maintenance, servicing and repairs. These include operating and maintenance instructions and technical specifications.

PERFORMANCE YOU CAN RELY ON



The SY135C resoundingly proves that the performance of a compact excavator is not necessarily determined by bulky size. Weighing a total of almost 15 tonnes, it offers the optimum ratio of power to manoeuvrability. In addition, the robust, wide heavy-duty undercarriage and the robust dozer blade provide a high level of stability. This means that it can optimally apply its power for a comprehensive range of applications where larger machines have to fit.

QUALITY IS WORTH IT

High-quality materials and careful machining are the basis for a **long service life**. This is part of a sophisticated concept: For example, the boom on the **topside and underside is manufactured from one single sheet** and welded continuously from front to back.

COMPACT POWER

The machine offers **excellent excavating forces at maximum stability** for its class.

EASY TO MAINTAIN

All routine checks and work on the machine can be carried out quickly and easily. For example, many of the machine's bearings can be lubricated with **grease nipples from just one point**.

COMPREHENSIVE PROTECTION

Safety for users, machines and the working environment is of the utmost importance at SANY. The SY135C's **safety equipment** includes, amongst other features, **a driving alarm and rotating beacon, an overload warning for lifting, safety valves** and of course the corresponding **protective plates over the blade cylinders**.

RELIABLE DRIVE

The powerful **ISUZU-4JJ1X engine** with AdBlue emission control ensures the correct forces are applied for all tasks.

EFFICIENCY AND POWER

In conjunction with the electronic fuel injection, the **autothrottle function** adjusts the engine speed to the power required. This means that the smart hydraulic system **reduces the fuel consumption**, engine wear and exhaust emissions.

Engine	ISUZU 4JJ1X
Rated power	78.5 kW / 2 000 rpm
Max. torque	375 Nm / 1 600 rpm
Max. travel speed	5.3 km/h
Swingspeed	12 rpm
Mainpump	2 x variable-piston-pump with electronic positive control
Max. oilflow	2 x 110 l/min

Not all products are available in all markets. As part of our continuous improvement process, we reserve the right to modify specifications and designs without giving prior notice. The figures may contain additional options.

SANY

Quality Changes the World

SANY HEAVY MACHINERY (UK) LTD
info@sanyuk.com
www.sanyuk.com