



**WACKER
NEUSON**
all it takes!

Compaction

Rammers, vibratory plates and rollers



Your reliable solution provider

We offer customers worldwide a comprehensive product range of construction machines and equipment, spare parts and services. Since the beginnings of our company in 1848, the Wacker Neuson brand has stood for reliability and innovative strength. Companies in the main construction industry, gardening and landscaping, industry and municipalities, among other sectors, rely on the innovative solutions from Wacker Neuson.

Wacker Neuson – **all it takes!**



Our services

When you need us, we are there. We not only advise you during the purchase of a machine, but also afterwards. You can trust our expert and quick support. Find out about our extensive services for constructions machines and construction equipment. With our Comprehensive Sales and Service network, we are always close by.

Experience more:
wackerneuson.com/services



Contents.

Rammers

Battery-powered rammers	4
2 stroke rammer	6
4 stroke rammer	8
Diesel rammer	9
Technical data	10

Vibratory plates

Battery-powered single-direction vibratory plates	12
Single-direction vibratory plates	14
Reversible vibratory plates with battery drive	18
Lightweight reversible vibratory plates	20
Medium-weight reversible vibratory plates	22
Heavy-weight reversible vibratory plates	24
Remote controlled vibratory plates	26
Coupling set	30
Technical data	32

Rollers

Trench roller	36
Walk-behind tandem rollers	38
Tandem roller with electric drive	40
Tandem rollers	42
Single drum soil compactors	48
Technical data	52

Battery-powered rammers.

Working in poorly ventilated environments and trenches is not a problem with battery-powered rammers, because they do not cause direct exhaust emissions. Also, our battery-powered rammers can be started very easily at the push of a button – it doesn't get anymore comfortable. There is no need to compromise on performance, as the battery-powered rammers offer the same performance as their gasoline-powered brothers.

Performance

- Battery charge is sufficient for a full workday with normal use

Efficiency

- Low energy costs and thus high savings over the long service life
- The Battery One battery can also be used for all other battery-powered construction equipment from Wacker Neuson (more on page 12)
- The battery can be replaced with a few simple steps



AS50e



AS30e

AS60e

Environmental friendliness

- The operator is not exposed to any exhaust emissions
- Therefore, the battery-powered rammers can be used without restrictions in trenches, tunnels and interior spaces.

Maintenance

- Thanks to the electric motor, maintenance work is completely eliminated



Healthier work; the operator is not exposed to direct exhaust emissions.



Especially on inner-city construction sites, the battery-powered rammers emit less noise and emissions and thus protect the construction site environment.



Starting at the push of a button – comfortably without a cable pull and at any outside temperature.

	AS30e	AS50e	AS60e
Ramming shoe size B (mm)	150	71	280
Operating weight (kg)	41.7	71	71
Stroke at ramming shoe (mm)	40	44	61
Max. percussion rate (1/min)	820	680	680
Type of drive	Electric motor	Electric motor	Electric motor

2 stroke rammer.

Vibratory rammers with 2-stroke engines are only available from Wacker Neuson. The powerful and self-developed engine WM80 is perfectly adapted to the requirements of vibratory rammers. For productive work and excellent results. For even more working comfort, there is the Plus series.

Performance

- Optimized cooling air flow for performance even at high outside temperatures
- Efficient air filter for consistently high engine output

Efficiency

- Engine can be started without problems even after side position
- Strong work performance due to large stroke, combined with high impact energy, high ramming frequency and fast forward travel
- Sturdy engine developed specifically for vibratory rammers makes maintenance easy and saves spare parts costs

Comfort

- Narrow compact design with optimum machine center of gravity facilitates maneuvering
- Angled guide handle provides ergonomic grip and relieves strain on the wrists

Environmental friendliness

- Very low CO emissions (carbon monoxide), thus unproblematic application in trenches

Transport

- Large, flexible lifting eye
- Transport rollers on the handle for easy pushing onto the truck bed

2plus

Additional features for the Plus vibratory rammer.

Safety

- Oil tank cover also available as lockable version (accessories), prevents incorrect refueling

Efficiency

- While idling, the engine switches off automatically after 10 minutes

Maintenance

- Separate, extra-large oil tank
- 120 hours of running time with one oil filling. (Comparison of 4-stroke rammer: Oil change after every 100 hours)

Quality

- Intelligent, electronic automatic low oil shutoff (2Plus-rammer): If the oil level is low, the rammer switches off automatically after a short time




	BS30	BS50-2	BS60-2
Operating weight (kg)	30	56/59	66
Mixed lubricated models			

	BS50-2plus	BS60-2plus	BS70-2plus
Operating weight (kg)	56/59	66	74
separately lubricated models			



Clean working: A catalytic converter is installed as standard—only Wacker Neuson offers this.

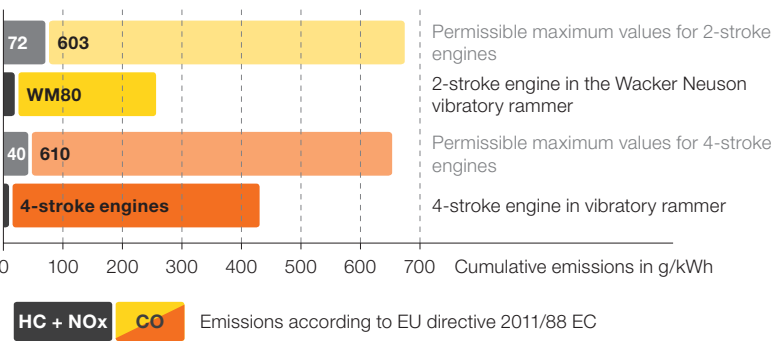

Emission values of gasoline rammers



Wrong refueling ruled out: Oil tank lockable (accessories).



Feed pump at the carburetor – for full and immediate power of the WM80.



BS30 – The specialist for narrow trench applications and pipe gusset compaction.

4 stroke rammer.

The work performance of the 4 stroke rammers impresses every day. Well thought-out functions make the use of the equipment even more comfortable, extend their long service life and minimize maintenance.

Performance

- High compaction performance thanks to long stroke and high impact force
- The efficient air filter with large filter surface offers very reliable filter efficiency with high capacity and thus continuously high engine output

Comfort

- Just one lever for starting, idling and stopping; with integrated fuel cock
- LED oil level warning display
- The specially spring-mounted guide handle reduces hand-arm vibrations (HAV)
- The angled shape of the guide handle in the gripping area ensures an ergonomic hand position

Efficiency

- The fast travel speed allows efficient working with high surface performance

Maintenance

- Honda is represented internationally as an engine manufacturer. So spare parts are available quickly



BS62-4A

Diesel rammer.

The DS70 is a well-balanced machine with compact dimensions and low CO₂-emission. Therefore, it is also well suited for compaction work in trenches. The DS70 offers strong performance for the compaction of cohesive, mixed and granular soils.

Comfort

- Just one lever for starting, idling and stopping; with integrated fuel cock
- Very large tank for long, uninterrupted work
- No need for a second fuel on the construction site

Efficiency

- Time and costs can be saved due to the high compaction performance

Maintenance

- Combustion engine with the lowest CO₂-emissions, therefore suitable for work in trenches



DS70



- EquipTrack enables seamless and accurate collection of operational data via a Bluetooth module, for more efficient and transparent operations on the construction site.
- EquipTrack can be easily installed on the device, and retrofitting is also possible without any problems.

	BS62-4A	BS68-4A	DS70
Operating weight (kg)	64	70	83
Type of drive	4-stroke engine		Diesel engine



Exact unit guiding – important during compaction in border areas.

Technical data.

	Unit	AS30e	AS50e	AS60e	BS30	BS50-2	BS60-2	BS70-2	BS50-2plus	BS60-2plus	BS70-2plus	BS62-4A	BS68-4A	DS70
Length x width x height	mm	620x361 x 1,050	610x361 x 1,050	610x361 x 1,050	620x363x980	673x343x940	673x343x965	673x343x965	673x343x940	673x343x965	673x343x965	662x347 x 920	662x347x950	735x370x1,000
Ramming shoe size (B)	mm	150	280	280	150	165 280	280	280	165 280	280	280	280	280	280
Operating weight	kg	41.7	71	71	30	56 59	66	74	56 59	66	74	64	70	83
Stroke at ramming shoe	mm	40	44	61	42	64	65	65	64	65	65	67	67	75
Max. percussion rate	rpm	820	680	680	795	700	700	700	700	700	700	689	689	670
Operating speed	m/min	–	11.4	12.1	–	7.9	9.8	8.9	7.9	9.8	8.9	15	14	13
Drive	–	Electric motor	Electric motor	Electric motor	Air-cooled single-cylinder 2-stroke gasoline engine						Air-cooled single cylinder 4-stroke gasoline engine			Air-cooled, single cylinder, diesel engine
Drive manufacturer	–	Wacker Neuson	Wacker Neuson	Wacker Neuson	Wacker Neuson	Wacker Neuson	Wacker Neuson	Wacker Neuson	Wacker Neuson	Wacker Neuson	Wacker Neuson	Honda	Honda	Yanmar
Type of drive	–	Electric motor	Electric motor	Electric motor	WM80	WM80	WM80	WM80	WM80	WM80	WM80	GXR120	GXR120	L48
Displacement	cm³	–	–	–	80	80	80	80	80	80	80	121	121	211
Max. output (DIN ISO 3046)	kW	–	–	–	1.1	1.8	1.9	2.0	1.8	1.9	2.0	2.7	2.7	3.1
At rpm	rpm	–	–	–	4,400	4,400	4,400	4,400	4,400	4,400	4,400	3,600	3,600	3,450
Fuel to oil ratio	–	–	–	–	50:1	100:1	100:1	100:1	120:1	120:1	120:1	–	–	–
Fuel consumption	l/h	–	–	–	0.9	1.2	1.2	1.3	1.0	1.2	1.3	0.75	0.75	0.9
Tank capacity (fuel)	l	–	–	–	2.2	2.9	2.9	2.9	3.0	3.0	3.0	3.0	3.0	4.2
Tank capacity (oil)	l	–	–	–	–	–	–	–	1.3	1.3	1.3	–	–	–
Range per battery charge (BOB10)	m	495	264	260	–	–	–	–	–	–	–	–	–	–
Range per battery charge (BOB14)	m	770	352	312	–	–	–	–	–	–	–	–	–	–

Technical data battery	Unit	BOB10	BOB14
Dimensions (length x width x height)	mm	296 x 396 x 322	296 x 396 x 322
Operating weight	kg	9.7	9.69
Capacity	Ah	20	28
Energy content	Wh	1,008	1,425
Rated voltage	V	51	51

The Wacker Neuson product range includes over 300 different product series with different versions. The product data may vary accordingly with the selection of different options. Not all Wacker Neuson products listed or shown here are however available or allowed in all countries. The Wacker Neuson products shown are examples and as such are subject to changes. We are happy to make you a specific offer upon request!

Reproduction only with the written approval of Wacker Neuson.

© Wacker Neuson SE




Oil.max, the premium oil from Wacker Neuson.

The high-quality, fully synthetic 2-stroke oil prevents wear in a sustained manner. For a long servicelife of your machine.

Battery One – One battery for all people and purposes.

Three battery versions – BOB5, BOB10, BOB14.

- With the Battery One batteries, you can power a variety of construction equipment – regardless of manufacturer.
- Specially developed for tough application on the construction site
 - Complete all the tasks of a typical workday with just one battery charge
 - Battery is changed without tools and in just a few easy steps

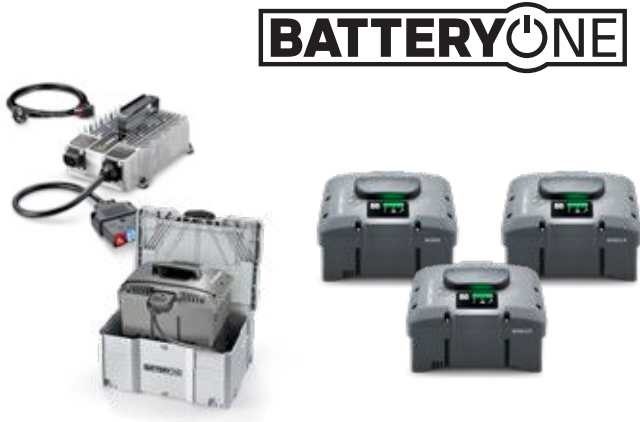

Charging and transport solutions.

With the Battery One battery chargers, your battery will be ready for use again in a short time. With the quick battery charger after just a maximum of 112 minutes of charging time.

Battery One also offers practical Systainer brand transport and charging boxes.

	BOB5	BOB10	BOB14
Installed capacity (Wh)	504	1,008	1,425
Weight (kg)	6.4	9.7	9.96

	BOC7	BOC13
Charging current (A)	7	13
Charging time (min) (BOB5/BOB10/BOB14)	90/160/255 min.	50/95/140 min.

Battery-powered single-direction vibratory plates.

The battery-powered single-direction vibratory plates by Wacker Neuson work completely emission-free and are thus suited for many sensitive areas of application. These can do everything that a normal vibratory plate can do: Compacting soils, vibrating paving stones and – with optional water tank – compacting asphalt.

Performance

- Battery charge is sufficient for the typical work of a full day. Consistent performance over the entire discharge phase of the battery

Transport

- The guide handle can be collapsed, which enables very compact transport and storage dimensions

Efficiency


- **DIREX**: Unique direct drive without V-belts offers efficient performance and long battery running time
- Low energy costs due to charging with electricity
- The Battery One battery can also be used for all other battery-powered construction equipment from Wacker Neuson (more on page 11)



With its high speed and wide base plate, the AP2560e is ideal for vibrating large paved surfaces.



No exhaust emissions, protects operators and the environment, and opens up new areas of application.

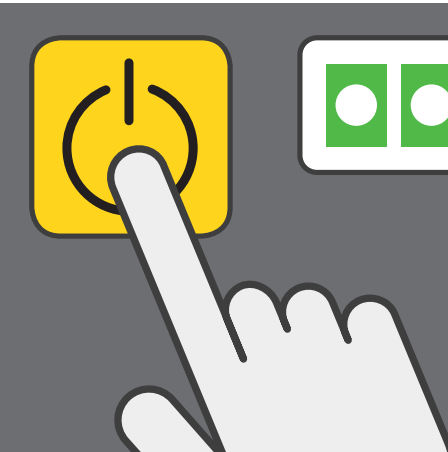

Starting at the push of a button – comfortably without a cable pull and at any outside temperature.

The APS series.

The APS series is distinguished by its outstanding handling capabilities. The guide handle responds clearly to steering movements, while simultaneously reducing hand-arm vibrations as much as possible. Turning and steering movements are transferred very easily to the machine. Clean finishes at curbs are easy to produce due to the angular side edges of the base plate.

Maintenance

- Maintenance-free electric motor without V-belt

Comfort

- The battery can be removed without tools in a few simple steps
- The low hand-arm vibration (HAV) values (< 5 m/s²) enable comfortable work

Quality

- Base plate made of extremely sturdy nodular cast iron and sturdy bearings for a long service life



	APS1030e	APS1135e	APS1340e
Operating weight (kg)	50 ¹	58 ¹	68 ¹
Range per battery charge BOB10 ² (m²)	430	540	650
Range per battery charge BOB14 ² (m²)	610	765	920

	APS1550e	APS2050e	AP2560e
Operating weight (kg)	77 ¹	87 ¹	143
Range per battery charge BOB10 ² (m²)	720	800	307
Range per battery charge BOB14 ² (m²)	960	1,065	528

¹ Water tank model plus 5 kg
² Depends on the soil and environmental influences

Single-direction vibratory plates.

These vibratory plates are at home on asphalt and soil. With the BPS- and DPS-series, you not only work comfortably, but also efficiently and economically. They are optimally suited for processing surface and subbases. They were designed for tough, long-term application on the construction site. The engines equipped with large power reserves, as well as the maintenance-free and durable exciter bearings contribute to this. The easy to reach throttle lever and vibration damped guide handle offer a high degree of operating comfort.

Comfort

- Large lifting eye, usable as a guiding aid
- The guide handle responds clearly to steering movements
- Low HAV, for greater working comfort
- When the wheel set is folded down, the guide handle locks automatically. Conversely, the guide handle is automatically unlocked when you fold up the wheel set
- Paving pad is hooked into the base plate at the front and tightened with nuts

Quality

- Permanently lubricated cylindrical rollerbearings
- Wear-resistant base plate made of nodular cast iron (GJS 700)



BPS1340



The paving pad (accessories) protects sensitive paved surfaces when vibrating. With only two bolts, it can be quickly fastened to the machine.



The wheel set (accessories) can be mounted easily. When folded down, the guide handle is automatically locked, and when folded up, released again.

Transport

- Forward-swiveling guide handle offers compact transport and storage dimensions
- Lift handle at the front of the base plate is wide enough for two hands

Efficiency

- The water tank with hinged lid is firmly mounted on the machine
- The large water tank (9 liters) with efficient wetting of the base plate, without wasting water, offers long interruption-free work



DPS2050

	BPS1030	BPS1135	BPS1340	BPS1550	BPS2050
Operating weight ¹ (kg)	53	61	71	84	94
Centrifugal force (kN)	10	11	13	15	20
Engine	Gasoline engine, Honda GX120, Briggs & Stratton XR550			Honda GX160, Briggs & Stratton XR750	

¹ Water tank model plus 5 kg

Single-direction vibratory plates.

The single-direction vibratory plates of WP-series can manage any narrow space and are thus particularly suitable for small areas. They are extremely easy to maneuver and particularly agile. The WP vibratory plate series are the high-performance pros for the compaction of asphalt and light mixed soils as well as for the vibration interlocking paving stones.

WP series

Efficiency

- The high travel speed ensures high productivity
- Sturdy design for effective long-term application
- Full width sprinkling without wasting water

Comfort

- Centered attachment of the guide handle for effortless turning
- Water tank with hinged lid and large rotary knob to regulate the amount of water



The large water tank holds 12 l and allows long work applications without refilling.



The tubular frame with integrated lifting eye can also be used laterally as a control handle, ideal for compaction along edges.



Maintenance

- Particularly wear-resistant V-belt, protected from damage by housing. Easy re-tightening possible
- Lifelong lubricated ball bearings

Transport

- Wheel set available as accessory

Quality

- The sturdy protective frame protects the engine and water tank from damage
- The rounded edges minimize the formation of stressed edges when turning the vibratory plate
- Base plate made of nodular cast iron (GJS700)
- Sturdy design for long-term application, e.g. compaction of asphalt surfaces



Low hand-arm vibration (HAV) values ($< 5 \text{ m/s}^2$) for working comfort even during prolonged application of the WP1550.

	WP1550
Performance (kN)	15
Weight (kg)	90–98
Type of engine	Gasoline engine

Reversible vibratory plate with battery drive.

The APU3050e is a technological milestone: It is the world's first reversible vibratory plate equipped with a direct drive without V-belts. It thus offers high compaction efficiency and complete freedom from maintenance. The emission-free drive and the low overall height make it the ideal compaction equipment for shoring in trenches.

Performance

- Consistent power output over the entire battery running time

Quality

- All-round protection due to steel cover
- Battery developed by Wacker Neuson
- Vibratory plate made of extremely sturdy, wear resistant materials
- Base plate made of nodular cast iron (GJS700)

Comfort

- Starts with the push of a button
- Intuitive guide handle with variable speed and direction change simply by turning it over
- Durable, self-engaging center pole lock for quick and reliable transport securing
- Low HAV (< 2.5 m/s²)



The operator can easily access the switch on the center pole.



With one battery charge, the APU3050e compacts up to 333 m² soil*.



Battery change in just a few, quick steps.



Environmental friendliness

- Because the machines are emission-free, new applications open up in areas with special requirements

Efficiency

- **DIREX**: Unique direct drive without V-belts offers efficient performance and long battery running time
- Lowest overall height for application in trench shoring
- Battery can be changed quickly and without tools
- Lifting eye suitable for different lifting tackles
- Integrated wheel set

Maintenance

- Motor mounted directly on the base plate without V-belt – no maintenance required

APU3050e

	APU3050e
Performance (kN)	30
Operating weight¹ (kg)	2,012
Drive	Electric motor
Range per battery charge BOB10 (m²)	238
Range per battery charge BOB14 (m²)	333

* Depends on the soil and environmental influences.

Lightweight reversible vibratory plates.

More operating comfort due to the forward and reverse travel direction combined with a compact design – that is what the small reversible vibratory plates from Wacker Neuson offer you. A finely coordinated portfolio offers the right model for every requirement.

Performance

- Rounded edges minimize the formation of stressed edges when turning the vibratory plate

Efficiency

- Sturdy transport roller with a wide contact surface prevents tracks in fresh asphalt
- Sprinkler system for optimal water distribution across the entire width of the base plate

Quality

- Sturdy protective frame for engine and water tank
- Base plate made of high quality nodular cast iron: for easy turning on asphalt, without scarifying



	WPU1550
Performance (kN)	15
Weight (kg)	90
Type of engine	Gasoline engine



Very easy to maneuver: thanks to the specially shaped base plate of the WPU1550.



Perfect center pole attachment: self-locking and absolutely backlash-free.



DPU series

Efficiency

- Compact dimensions, high performance
- Integrated wheel set
- High surface performance through fast advance travel
- Lifting eye can be folded, thus the vibratory plate achieves compact dimensions and can be guided more easily, for example, under low obstructions
- Widths from 40 to 70 cm available

Maintenance

- Very good accessibility to all maintenance points

Comfort

- The height of the center pole is easily adjustable
- Intuitive guide handle with variable speed
- Electric starter is available as an option for the DPU3050, DPU3060, DPU3750 and DPU3760
- Integrated wheel set: maintenance-free and sturdy – even in the toughest conditions

Quality

- The vibratory plate is made of extremely sturdy, wear resistant materials
- Base plate made of nodular cast iron (GJS700)



Top-Speed-Version: for high surface performance in laying paving stone.

	DPU 2540*	DPU 2550	DPU 2560	DPU 3050*	DPU 3060*	DPU 3070*	DPU 3750*	DPU 3760
Performance (kN)	25	25	25	30	30	30	37	37
Weight (kg)	145–160	166	171	181–206	190–215	195	247–265	274
Type of engine	Diesel engine							

* Models optionally also available with gasoline engine (BPU)

Medium-weight reversible vibratory plates 300 – 600 kg.

The medium-weight reversible vibratory plates offer high productivity as a result of its high compaction force in combination with fast forward and reverse travel speeds. They are the all-rounders for all construction sites where high demands are placed on the performance efficiency of a unit. In addition, they offer excellent characteristics in terms of long service life and operating comfort.

DPU series

Efficiency

- Compact dimensions, high performance
- High surface performance through fast advance travel
- With an exciter frequency of 69 Hz, the vibratory plate is universally deployable for various construction processes

Quality

- Base plate made of nodular cast iron (GJS700)
- The sturdy pipe frame offers all-around reliable protection of the engine



Comfort

- Low HAV (< 2.5 m/s²)
- The height of the center pole is easily adjustable
- The sturdy, self-engaging center pole lock offers a very fast and reliable retainer for transport
- Intuitive guide handle with variable speed adjustment

Maintenance

- Very good accessibility to all maintenance points
- If the battery is discharged, the machine can be jump-started very quickly via a removable pin




Safe in every case: If the guide handle is released, the unit only vibrates on the spot.



Compatec compaction display: It indicates when the maximum compaction has been achieved with the unit.
Learn more at: www.wackerneuson.com/compatec



Low hand-arm vibrations



Unit operation without any time restrictions

No documentation requirement: Hand-arm vibrations (HAV) are below 2.5 m/s² thanks to the vibration-reduced center pole.

	DPU 40	DPU 45	DPU 4545	DPU 5545*	DPU 6555
Performance (kN)	40	45	45	55	65
Weight (kg)	383	385	402–425	399–447	480–527
Type of engine	Diesel engine				

* Models optionally also available with gasoline engine (BPU)

Heavy-weight reversible vibratory plates > 600 kg.

The heavyweight reversible vibratory plates offer an uncompromisingly strong compaction performance with compact dimensions and a high level of operating comfort. Therefore, they are the compaction machine of choice for demanding compaction work such as road construction. The water-cooled engine provides reliable high performance. The product range consists of high-performance, heavy-duty vibratory plates with centrifugal forces ranging from 80 to 110 kilonewtons.

Safety

- Lockable machine hood; this way, all important parts, e.g. ignition lock, operating panel, fuel tank, and remote control, are protected from unauthorized access
- Starter Pin can be programmed individually

Efficiency

- High performance with compact dimensions
- The low overall height allows passage below transverse spindles in shoring
- The water-cooled engine offers reliable cooling even at high external temperatures

Maintenance

- The concept consisting of a two-piece hood, protective frame and side panels, enables individual parts to be replaced very affordably if damaged
- The high capacity of the air filter ensures long maintenance intervals and saves time and costs



	DPU80	DPU90	DPU110
Performance (kN)	80	90	110
Weight (kg)	756/771	756/771	813/830
Operating width (mm)	670/770	670/770	870/970

Comfort


- Low HAV (< 2.5 m/s²)
- The engine can be conveniently started at the push of a button
- Simple height adjustable center pole
- Intuitive guide handle with variable speed adjustment
- The control panel can be used in 12 languages
- Large tank, one filling is enough for a normal working day

Transport

- Large, easily accessible tie-downs and therefore less transport damage
- The sturdy, self-engaging center pole lock offers a very fast and reliable retainer for transport

Quality

- The vibratory plate is made of extremely sturdy, wear resistant materials
- The autostart ensures that the engine starts only at the optimum temperature

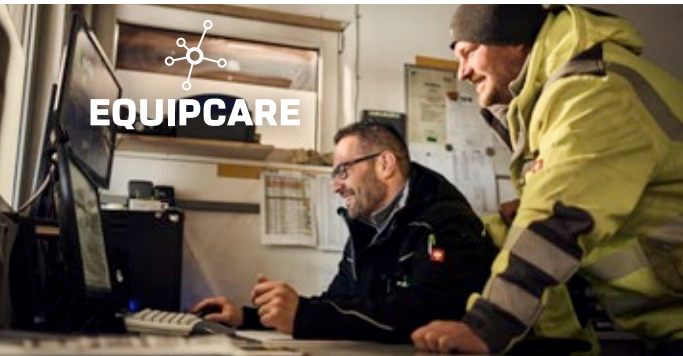

The Compamatic (accessories) combines the compaction control Compatec with a Telematics function. The compaction results of a machine can be tracked at any time from your desk in the EquipCare manager.



Compatec compaction control shows the operator when the best possible compaction has been achieved with this machine. This saves excess passes and time.



Strong performance for demanding compaction work in road construction.



Compamatic heat map for compaction control from your desk.

Heavyweight remote controlled reversible vibratory plates DPUr > 700 kg.

Sturdy and compact in design, the remote-controlled vibratory plates offer the same high compaction performance as the models with center pole. The convenient remote control with two joysticks allow the operator to work away from vibrations, exhaust emissions and noise pollution. The innovative control unit simultaneously controls forward travel and turning movement allowing the plate to be steered efficiently and precisely even on curves and around obstacles.

Transport

- Large, easily accessible tie-downs and therefore less transport damage

Maintenance

- The concept consisting of a two-piece hood, protective frame and side panels, enables individual parts to be replaced very affordably if damaged
- The high capacity of the air filter ensures long maintenance intervals. This saves time and expense

Efficiency

- Compamatic (optional) helps plan out construction site processes better, ensuring quality (see info page 26)
- The low overall height allows passage below transverse spindles in shoring
- The water-cooled engine offers reliable cooling even at high external temperatures

Quality

- Made of extremely sturdy, wear resistant materials
- The autostart ensures that the engine starts only at the optimum temperature

Comfort


- The engine can be conveniently started at the push of a button
- The control panel can be used in 12 languages
- Large tank, one filling is sufficient for 4 hours of long-term application

Safety


- Lockable machine hood; this way, all important parts, e.g. ignition lock, operating panel, fuel tank, and remote control, are protected from unauthorized access
- Starter Pin can be programmed individually
- Infrared remote control with many safety features ensures that the operator works away from noise and exhaust emissions



	DPU80r	DPU110r
Performance (kN)	80	110
Weight (kg)	709/724	793/810
Operating width (mm)	670/770	870/970

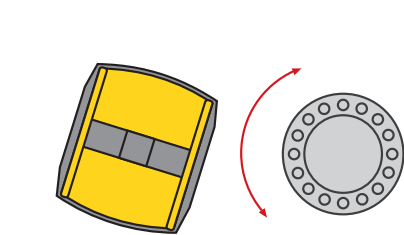


Direction change while traveling: For clean turning of curves and a high compaction performance.

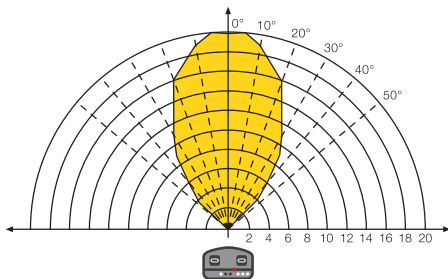

Far-reaching control: A transmission field of up to 20 meters and an angle of 45° guarantee a high level of working comfort.



High level of safety: It stops moving automatically if there is no clear line of sight between the operator and the compaction equipment.



Intelligent proximity recognition sensor: The machine stops automatically when the minimum safety distance between the operator and the machine is less than 2 m.



Remote-controlled vibratory plate DPU130r.

The DPU130r is the most powerful vibratory plate in the market. With a centrifugal force of 130 kN and an operating width of 120 cm, it easily achieves the productivity of a 7 ton roller – however, thanks to its lower acquisition and operating costs, it is much more economical. Wacker Neuson has developed this remote-controlled vibratory plate for practical and heavy-duty applications. This new design was immediately awarded two innovation prizes.

Performance

- The fully hydraulic, variable exciter adjustment allows the machine to be controlled very precisely
- Changes in direction with simultaneous travel are possible, allowing for clean turning of curves and a high surface performance

Efficiency

- Thanks to the extreme operating width, large areas can be compacted in a very short time
- Achieves higher compaction performance per hour than a 5 ton roller
- Better depth effect of the vibratory plate makes the number of passes required less than with a 7 ton roller
- Has significantly lower costs for acquisition, operation and maintenance than medium-weight rollers
- The divided base plate allows the machine to be controlled easily and precisely



Quality

- Autostart with pre-heat and warm-up phase
- Made of extremely sturdy, wear-resistant materials
- The base plate is made of nodular cast iron (GJS700)

Comfort


- Control panel in 12 languages offers a wide range of comfort and diagnostic functions: Operating displays, entry of a starter PIN and error memory with 56 entries
- There is a large intermediate space between the upper mass and the base through which dirt and stones are transported outwards during operation



The best service access – simply fold open the cover.



A low loader is not necessary: The DPU130r only weighs 1,200 kg and can be transported on a truck bed.

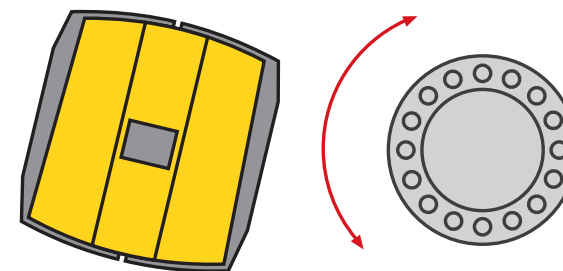

Excellent steering: continuous speed adjustment with simultaneous highest reaction speed.



High level of safety: trouble-free operation of up to three machines simultaneously.

Coupling set.

The coupling set is the ideal machine for crushed stone compaction in railway construction. It is light enough not to sink into the track bed and has a large operating width of three meters. Therefore, the entire track bed can be compacted with a few passes. The remote control allows the operator to work outside of the danger area, standing away from dust, exhaust emissions and noise pollution. The three-coupled DPU110 vibratory plates can also be uncoupled; thus, they can be used and transported individually.

Efficiency

- Unique operating width of 3 m for the compaction of large areas
- Module of the coupling set can also be deployed individually
- The standard Compamatic helps plan out construction site processes better, ensuring quality (see info page 25)
- The water-cooled engine offers reliable cooling even at high external temperatures

Quality

- The vibratory plate is made of extremely sturdy, wear resistant materials
- The autostart ensures that the engine starts only at the optimum temperature

Comfort

- Engine start at the push of a button
- Control panel in 12 languages
- Large tank, one filling is sufficient for 4h of long-term application



Safety

- The machine's protective hood can be locked; this way, all-important parts, e.g. ignition lock, operating panel, fuel tank, and remote control, are protected from unauthorized access
- Starter Pin can be programmed individually
- Infrared remote control with many safety features ensures that the operator works away from noise and exhaust emissions

Transport

- Large, easily accessible tie-downs and therefore less transport damage

Maintenance

- The concept consisting of a two-piece hood, protective frame and side panels, enables individual parts to be replaced very affordably if damaged
- The high capacity of the air filter ensures long maintenance intervals
- Optimum accessibility to all maintenance points



Flexible lifting: the lifting beam can be used both for the 2-unit and for the 3-unit coupling set.



Stable coupling: quickly and reliably connected with a few screws.



Economical use of the machines – with coupling set or individually.



Extreme operating width of 3 m; with only one pass, a very broad surface can be compacted.

Accessories for vibratory plates.



	Water tank (liters)	Transport device	Paving pad
APS1030e, APS1135e, APS1340e, APS1550e, APS2050e	○ (8)	○	○
APS1030we, APS1135we, APS1340we, APS1550we, APS2050we	● (8)	○	○
AP2560e	–	○	○
APU3050e	–	●	○
BPS1030A, BPS1135A, BPS1340A	○ (8)	○	○
BPS1030Aw, BPS1135Aw, BPS1340Aw	● (8)	○	○
DPS2050H	○ (8)	○	○
DPS2050HW	● (8)	○	○
WP1550A	○ (12)	○	○
WP1550Aw	● (12)	○	○
WPU1550A	○ (12)	○	○
WPU1550Aw	● (12)	○	○

– not available ○ available ● integrated



Accessories for vibratory plates.



	Set of extension plates in various widths	Transport device	Paving pad
BPU2540A	–	●	○
DPU2540H	–	●	○
DPU2550H	–	●	○
DPU2560H/DPU2560Hts	–	●	○
BPU3050A	–	●	○
DPU3050H/DPU3050He	–	●	○
DPU3060H/DPU3060Hts	–	●	○
DPU3070H	–	●	○
DPU3750Hts/DPU3750Hets	–	●	○
DPU3760Hts/DPU3760Hets	–	●	○
DPU4045Ye	○	○	○
DPU4545H/DPU4545He/DPU4545Heap	○	○	○
BPU5545A	○	○	○
DPU5545H/DPU5545He/DPU5545Heap	○	○	○
DPU6555H/DPU6555He/DPU6555Hec	○	–	○
DPU80	–	–	–
DPU90	–	–	–
DPU110	–	–	–
DPU80r	–	–	–
DPU110r	–	–	–
DPU130r	–	–	–

– not available ○ available ● integrated



Technical data.

APS series

Specification	Unit	APS1030e	APS1135e	APS1340e	APS1550e	APS2050e
Weight	kg	50*	59*	68*	77*	87*
Centrifugal force	kN	10	11	13	15	20
Operating width	mm	300	350	400	500	500
Frequency	Hz	98	98	98	98	98
Drive		Electric motor				
Rated power at 3,600 rpm	kW	–	–	–	–	–
Range per battery charge (BOB10)	m²	430**	540**	624**	720**	750**
Range per battery charge (BOB14)	m²	610**	765**	920**	960**	938**

WP series

Specification	Unit	WP1550
Weight	kg	90–98*
Centrifugal force	kN	15
Operating width	mm	500
Frequency	Hz	98
Engine		Honda GX160
Rated power at 3,600 rpm	kW	3.6

BPU- & DPU-series 25–37 kN

Specification	Unit	BPU2540	DPU2540	DPU2550	DPU2560	BPU3050	DPU3050	DPU3060	DPU3070	BPU3750	DPU3750	DPU3760
Weight	kg	145	160	166	171	181	206	190–215*	195	247	265	274
Centrifugal force	kN	25	25	25	25	30	30	30	30	37	37	37
Operating width	mm	400	400	500	600	500	500	600	700	500	500	600
Vertical clearance	mm	666	736	736	736	777	777	777	777	777	777	–
Frequency	Hz	90	90	90	90	90	90	90	90	90	90	90
Engine		Honda GX160	Hatz 1 B 20			Honda GX270	Hatz 1 B 30			Honda GX270	Hatz 1 B 30	
Rated power	kW	3.1 (at 2,840 rpm)	3.1 (at 2,800 rpm)	3.1 (at 2,800 rpm)	3.1 (at 2,800 rpm)	5.1 (at 3,600 rpm)	4.2 (at 2,800 rpm)	4.2 (at 2,800 rpm)	4.2 (at 2,800 rpm)	5.1 (at 3,600 rpm)	4.2 (at 2,800 rpm)	4.2 (at 2,800 rpm)
Options		–	–	–	Top Speed Version	–	Electric starter	Electric start, top speed version	–	–	Electric starter	Electric starter

BPU- & DPU-series 40–130 kN

Specification	Unit	DPU40	DPU45	DPU4545	BPU5545	DPU5545	DPU6555	DPU80	DPU90	DPU110	DPU80r	DPU110r	Coupling set	DPU130r
Weight	kg	383	385	376*	340	399–447*	480–527*	756–771*	756–771*	813–830*	709–724*	793–810*	2,616	1,170
Centrifugal force	kN	40	45	45	55	55	65	80	90	110	80	110	3 x 110	130
Operating width	mm	440	440	450	450	604/750	710 x 860	670/770	670/770	870/970	670/770	870/970	3,000	1,202
Vertical clearance	mm	764–859	764–859	764	725	790	861	830	830	830	830	830	830	996
Frequency	Hz	69	69	69	69	69	69	56	63	60	56	60	60	58
Engine		Yanmar L70V	Yanmar L70V	Yanmar L70V	Honda GX390	Hatz 1 D 42S	Hatz 1 D 81S	Kohler 702		Kohler LDW 1003	Kohler LDW 702	Kohler LDW 1003	Kohler LDW 1003	Kohler KDW 1404
Rated power	kW	4.5 (at 3,000 rpm)	4.5 (at 3,000 rpm)	4.5 (at 3,000 rpm)	6.4 (at 2,600 rpm)	6.4 (at 2,850 rpm)	9.6 (at 2,800 rpm)	11 (at 3,600 rpm)	11.7 (at 3,600 rpm)	16 (at 3,600 rpm)	11 (at 3,600 rpm)	16 (at 3,600 rpm)	16 (at 3,600 rpm)	21 (at 2,700 rpm)
Options		Electric starter standard	Electric starter standard	Electric starter standard, operating hour meter	–	Electric starter, Compatec, operating hour meter, extra-wide extension plates	Electric starter, Compatec, operating hour meter, extra-wide extension plates, narrow protective cage	Overload protection, Compatec incl. overload protection; with electric start and operating hours meter as standard	Overload protection, Compatec incl. overload protection; with electric start and operating hours meter as standard	Overload protection, Compatec incl. overload protection; with electric start and operating hours meter as standard	Overload protection, Compatec incl. overload protection; with electric start and operating hours meter as standard	Overload protection, Compatec incl. overload protection; with electric start and operating hours meter as standard	Overload protection, Compatec incl. overload protection; with electric start and operating hours meter as standard	Standard with electric starter, operating hour meter and overload protection

– not available
* Weight depends on the additional options selected ** Depends on the soil and environmental influences

AP series

AP2560e
143*
25
600
98
Electric motor
–
307**
582**

APU series

APU3050e
212
30
500
90
Electric motor
–
238
333

BPS series

BPS1030	BPS1135	BPS1340	BPS1550	BPS2050
53*	61*	71*	84*	94*
10	11	13	15	20
300	350	400	500	500
98	98	98	98	98
Honda GX120, Briggs & Stratton XR550			Honda GX160, Briggs & Stratton XR750	
2.6	2.6	2.6	3.6	3.6
–	–	–	–	–
–	–	–	–	–

DPS series

DPS2050
115*
20
500
98
Hatz 1 B 20
3.4
–
–

WPU series

Specification	Unit	WPU1550
Weight	kg	89–96*
Centrifugal force	kN	15
Operating width	mm	498
Frequency	Hz	98
Engine		Honda GX160
Rated power at 3,600 rpm	kW	3.6

The Wacker Neuson product range includes over 300 different product series with different versions. The product data may vary accordingly with the selection of different options. Not all Wacker Neuson products listed or shown here are however available or allowed in all countries.

The Wacker Neuson products shown are examples and as such are subject to changes. We are happy to make you a specific offer upon request!

Reproduction only with the written approval of Wacker Neuson.

© Wacker Neuson SE

Trench roller RTLx-SC3.


The Rt-trench roller with the infrared-remote control SC3 delivers proven compaction results with safe operation. The intelligent control unit works with an infrared signal with line-of-sight control. The articulated trench roller with sheepfoot drums has exciters located under the axle in each drum for efficient transfer of compaction energy to the soil, and thus excellent compaction results. The compaction of excavated material and subbases of foundations, roads and parking lots is the specialty of RT.

Efficiency

- Low center of gravity due to the positioning of the exciters under the axle
- Two-part drums allow convenient conversion from 82 cm to 56 cm drum width
- A patented third infrared-receiver eye on the upper side of the trench roller prevents losses of signal
- Articulated steering ensures an inside turning radius of just 1.6 meters
- Selection between high and low compaction force per infrared remote control


Maintenance

- The permanently lubricated exciter and drive systems are maintenance-free
- All other machine components are easily accessible thanks to the wide-opening hoods
- LED Ring: Informs the operator about the operating and functional status of the machine
- Maintainable remote control box
- On board display, shows all important service information

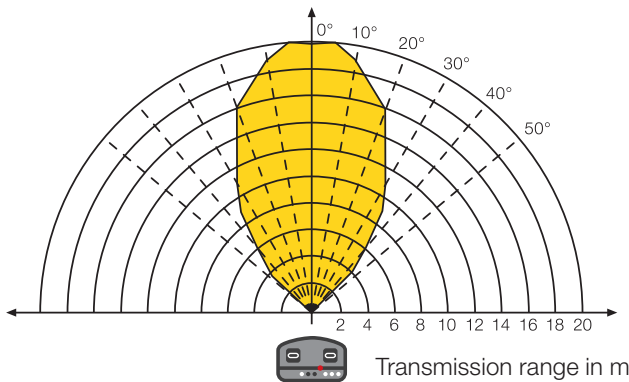

Far-reaching control:

A transmission field of up to 20 meters and an angle of 45 degrees provide a high level of working comfort.

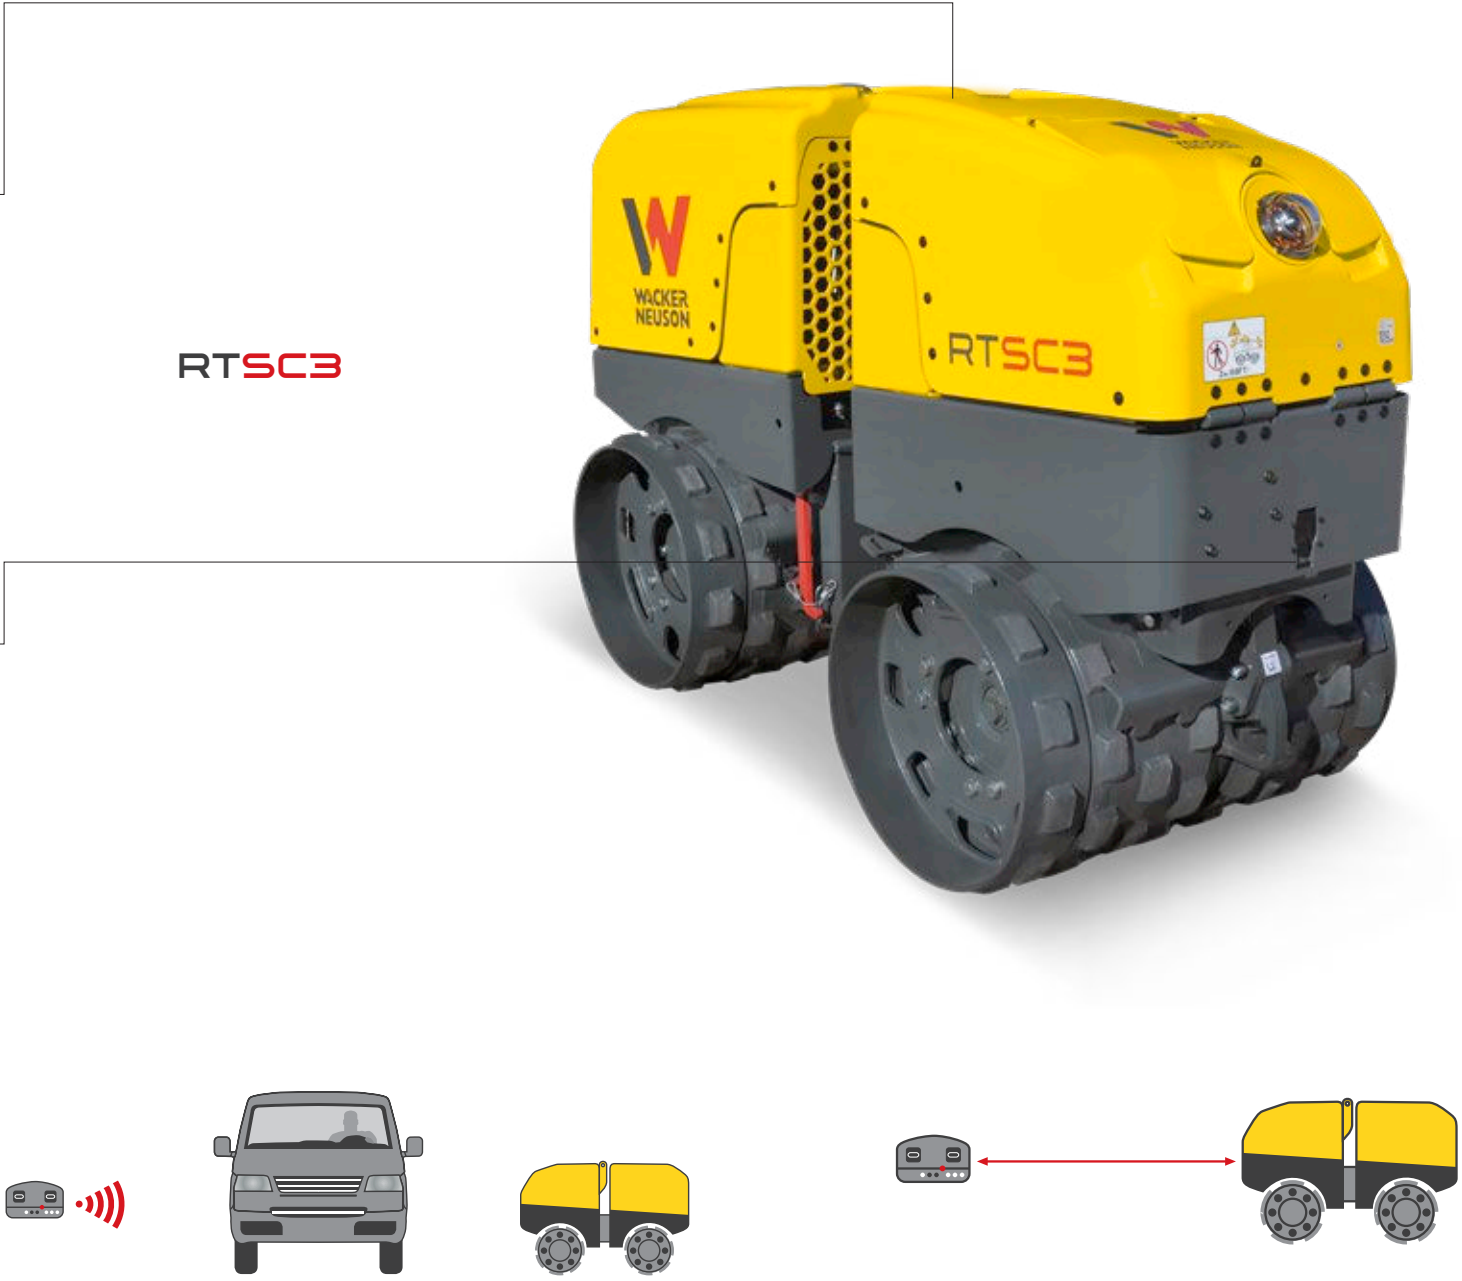

High level of safety:


It stops moving automatically if there is no clear line of sight between the operator and the compaction equipment.

Intelligent proximity recognition sensor:

It stops automatically at a minimum safety distance of less than 2 meters between the operator and the compaction equipment.

Safety

- Through the remote control, the operator is not exposed to any hazards even when compacting in the trench
- Anti-tip device: Lock mode switches off the machine when the operating angle from side to side exceeds 45°

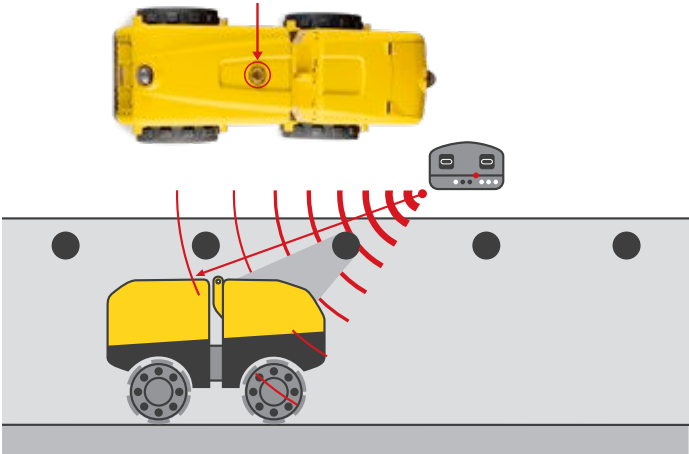

Additional 3rd infrared contact point prevents losses of signal:

The location of the 3rd point of contact on the top side of the machine guarantees a permanent connection between the remote control and roller.

Walk-behind tandem rollers RD7.

The walk-behind dual-vibration roller, RD7, supplies excellent performance in both soil and asphalt compaction – thanks to the optimally integrated frequency and two vibration stages. At the same time, the roller is characterized by its ergonomically arranged operator controls, such as, the engine rpm control attached to the center pole.

Efficiency

- All control elements are located directly on the guide handle
- Speed adjustment for engine with three positions (off, idling, full throttle) directly on the center pole
- Two vibration levels for different subbases
- The variable protective cage concept gives the greatest possible flexibility

Comfort


- Ergonomic handle and travel lever with recessed grips
- Vibration-damped center pole with lowest HAV in the market (< 2.5 m/s²)

Maintenance

- Easy, tool-free access to all service points
- Good visibility of fill levels



Long center pole facilitates steering and turning, especially in small areas.

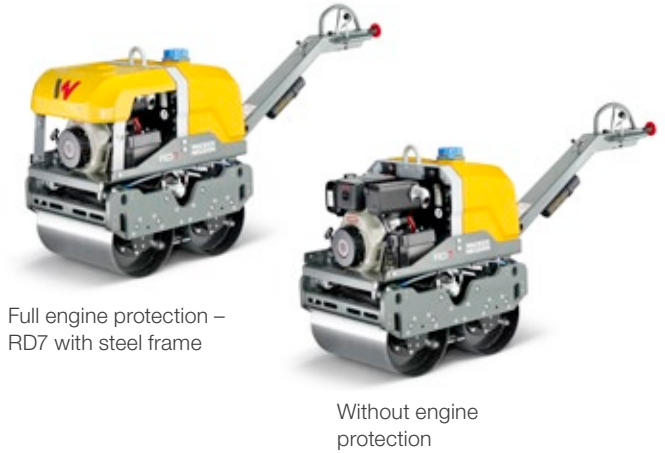

The variable protective frame concept gives the greatest possible flexibility, for different requirements and applications.

Tandem rollers RD18.

The RD18 is a compact and particularly agile roller of the 1.8 ton class. Thanks to its 3-point-articulated joint, combined with a large drum diameter, it accomplishes a uniform compaction performance and a high-quality asphalt surface. A special feature of the RD18 is the unilateral drum support with offset drums, enabling precise compaction very close along edges and walls on both sides.

Transport

- Compact transport and storage dimensions can be achieved by folding down the ROPS frame

Performance

- Three-point articulated pendulum joint for even front and rear weight distribution

Comfort


- The work platform is vibration decoupled and ergonomically designed
- The compact design allows a good view of the drums at all times

Efficiency

- All RD and RC rollers have the same simple operating concept
- The compact design enables high maneuverability on narrow construction sites and thus faster work
- Operator panel with a language-neutral, graphical and thus intuitive interface



Tapered design: for an unobstructed view of the drum edges, the machine surroundings and the construction site.

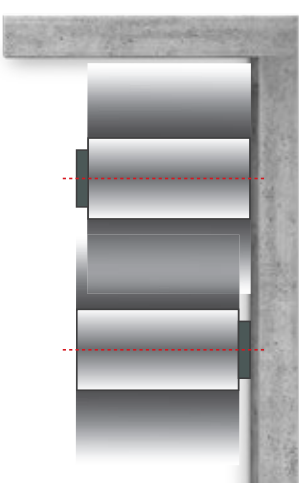

Clear sided curb clearance allows flush rolling both right and left: thanks to the offset unilateral drum support; ideal for work along walls.

Tandem rollers with electric drive.


The electric rollers RD24e and RD28e, with an operating weight of barely 2.5–2.8 tonnes and a drum width of 120 centimeters, are the all-rounders for the emission-free construction site. The rollers are powered by a powerful and proven lithium-ion battery that provides up to 3.5 hours of operating time. They are charged easily and quickly at any 230 V or 400 V plug receptacle and are thus versatile.

Performance

- A 23.4 kWh lithium-ion battery with integrated cooling concept, energy recovery from the system make the rollers highly efficient
- Efficiency increase in the vibration system from approx. 32 % to approx. 84 %.
- Energy recovery from the system

Efficiency

- The maintenance-free synchronous engine offers high torque and constant power output in continuous operation
- Quick and easy charging at any 230 V / 400 V plug receptacle
- Electro-hydraulic driving and pure electric vibration

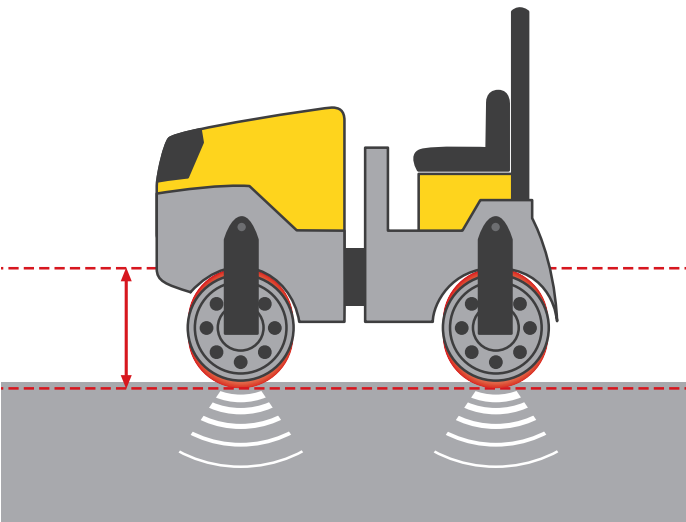

Both the vibration drums optimally bring the material to be compacted optimal oscillation with quick successive vertical forces.

	RD24e	RD28e
Operating weight (kg)	2,385–2,525	2,595–2,755
Drum width (cm)	100	120



The maintenance-free synchronous engine not only impresses with its constant power output, it also enables a high peak load.



A fully electric vibration system ensures maximum efficiency at low operating costs.

Environmental friendliness

- 100 % electric – 0 % emissions in application
- Very low noise emissions for applications in sensitive environments
- More application options thanks to the electric vibration drive
- Very low service and operating costs

Tandem rollers RD24, RD28, RD40, RD45.

The rollers of the 2.5 ton and 4 ton class are compact machines for any construction site. With their three-point-articulated-pendulum joints, they always achieve even weight distribution with optimum maneuverability and driving stability. In this way, perfect and high-quality asphalt surfaces can be produced. The user benefits from the intuitive operation and the comprehensive view of the compaction area. Thanks to their compact dimensions, they can be used without any problems even in confined areas.

Efficiency

- All RD and RC rollers have the same simple operating concept
- The compact design enables high maneuverability on narrow construction sites and thus faster work
- Operator panel with graphical interface for intuitive operation
- The overhang over the drum edge first begins very far up so that, for example, compaction can also take place right up to the edge of higher walls

Performance

- The three-point articulated pendulum joint ensures an even distribution of the weight on the front and rear drums/tires



Transport

- With the ROPS frame folded down, the RD rollers achieve compact transport and storage dimensions

Comfort

- The work platform is vibration decoupled and ergonomically designed
- The operator has perfect all-round visibility. Fewer mirrors and no rear-view camera are required



Get started with the work quickly: Self-explanatory display and joystick are intuitive to operate.



Safe working: Good all-round visibility from the operator's seat – also of the drum and wheels.




Optimum view due to the laterally adjustable seat.



Easy radiator cleaning due to separately removable flap.

The advantages of the tandem and combination rollers in detail.

From the technical outfitting for the actual compaction work to the comfort features to the practical details for transport or maintenance: Here you can see what all models have in common.

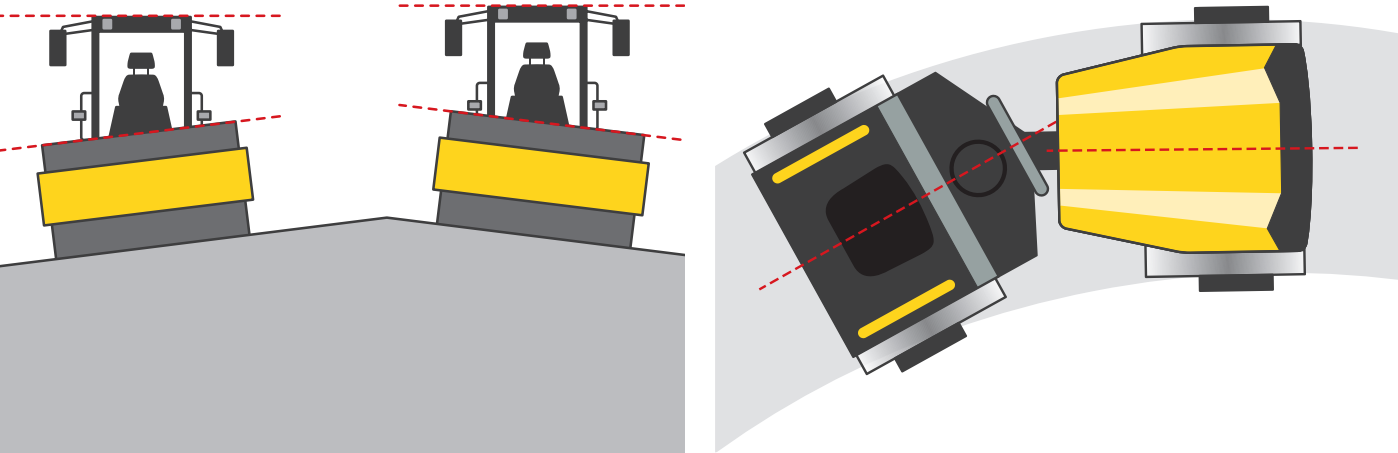

All RD models have three-point articulated pendulum joint.

Uniform compaction and high travel stability are the key advantages of the three-point-articulated-pendulum joint, with which all tandem- and combination-rollers, except RD7, are equipped. It provides a uniform pressure distribution on the tires or the drums, especially

when turning curves. In addition, it improves maneuverability and provides for maximum tipping safety and stability, even on uneven site conditions, e.g. coarse gravel.




High level of comfort for the operator.

All rollers are equipped as standard with a completely vibration-insulated operator's cab. Thus the operator is optimally protected from vibrations. Additional safety is provided by the steps for the convenient entry, spacious legroom and an operator's seat, which can be individually adapted to the weight and height. All rollers from Wacker Neuson except the RD18-80 have a laterally movable seat.



The best lighting.

Whether for work at dusk, at night or when cloudy: The rollers from Wacker Neuson provide sufficient light. Optional working lights can be attached to the ROPS-frame for the tandem-axle and combination models. Already included in the standard scope: a rotating beacon which permits the roller on public roads.

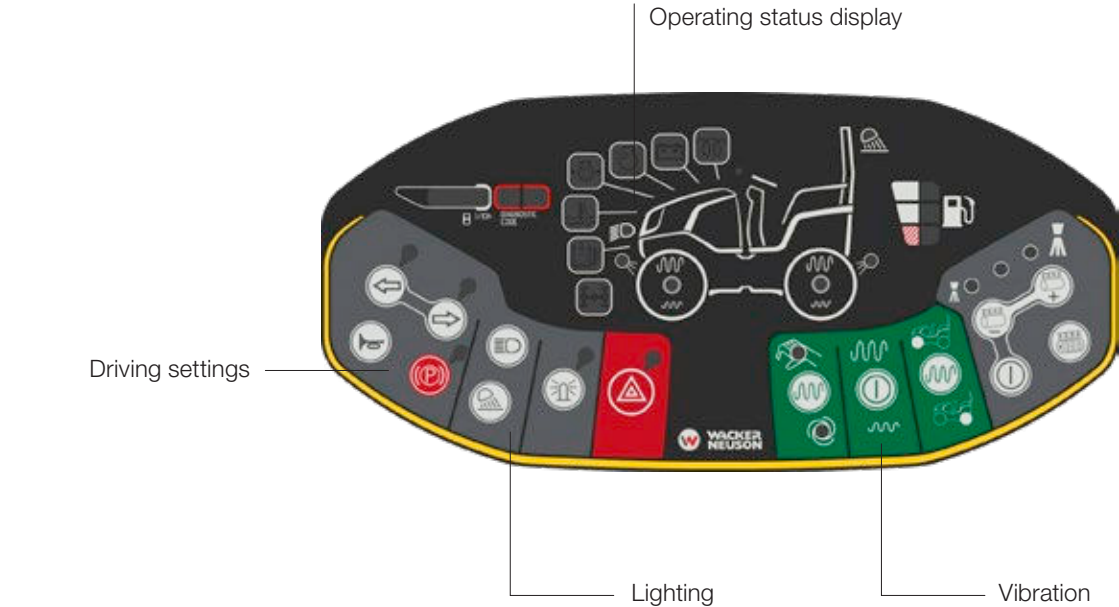

Clearly arranged display.

Self-explanatory, intuitive to operate and clearly structured: The display of the rollers from Wacker Neuson is very user-friendly.

This way, operators can manage everything starting from the first moment – an important aspect for rental yards in particular.



Standard fold-down ROPS (Roll Over Protective Structure).

The ROPS frame provides added safety. It can be folded to the rear as a standard. The roller achieves very compact transport dimensions in this way.



Simple maintenance.


All rollers are designed so that maintenance is taken care of with a few steps: This includes good access to the entire engine compartment as well as easy exchange of the air filter. This saves time and money.



Practical central lifting point.

The centrally located central lifting point allows for a horizontal raising and lowering of the machine. The roller is thus easily,

quickly and safely transferred. RD18, RD24 and RD28 have a central lifting point.

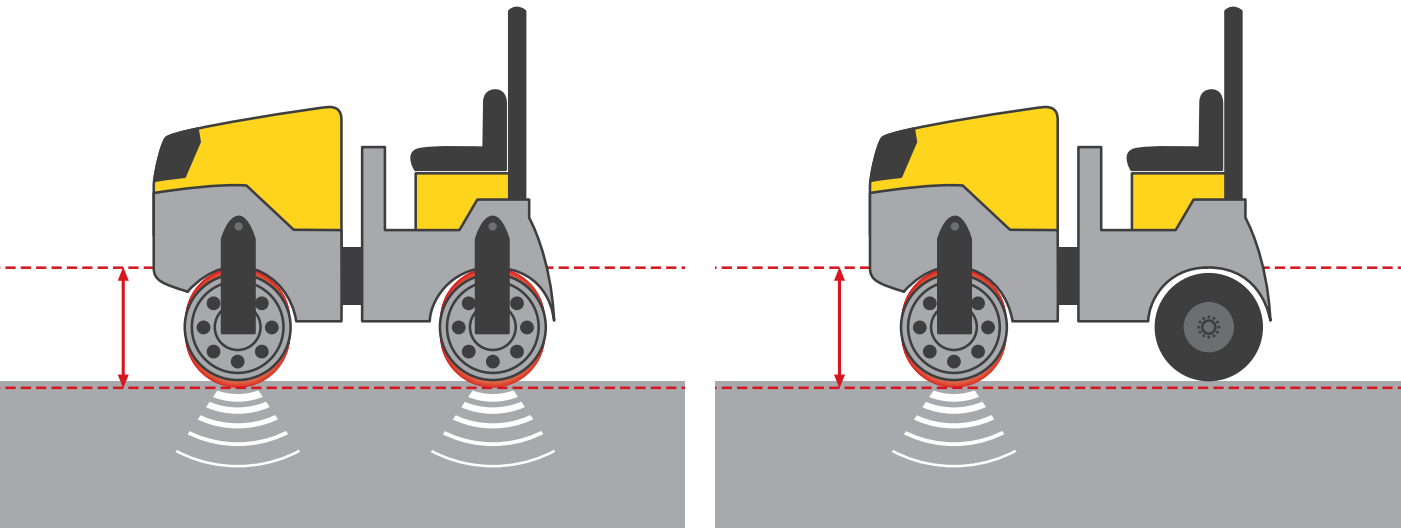

**Tandem roller:
Front and rear with vibration drums.**

The vibration drum optimally brings the material to be compacted into oscillation with quick successive vertical forces. The built-in eccentric weight provides for a fast rotation and you achieve excellent compaction performance.
Ideal for: All classic compaction work.
Our tandem roller models are: RD18-80, RD18-100, RD24-100, RD28-120, RD40-130, RD45-140 and RD7

**Combination roller:
Vibration drum in the front, tires in the rear.**

The combination roller is equipped with only one vibration drum. The rear axle consists of rubber tires for pressing on the asphalt. This creates particularly high quality and smooth surfaces.
Ideal for: Asphalt compaction on sidewalks and bicycle tracks.
Our combination roller models are: RD18-100c, RD24-100c, RD28-120c, RD40-130c, RD45-140c


Oscillation roller: Vibration drum in the front, oscillation drum in the rear.

The oscillating movement is caused by a quickly changing forwards-reverse rotary movement of two masses in the drum. These forces are continuously directed into the ground in a targeted manner. At the same time, the vibration exposure is significantly lower than with a vibration drum. This also has a positive effect on the service life as well as the driving comfort of the machine.

Ideal for: Compaction work in the inner city, near vibration-sensitive structures (e.g. bridges, residential buildings, historic buildings), on seams (hot to cold) and for minor repair work. Our oscillation roller models are: RD24-100o, RD28-120o, RD40-130o, RD45-145o.


Operating mode 1:
Static in the front, oscillation in the rear

Operating mode 2:
Vibration in the front, static in the rear

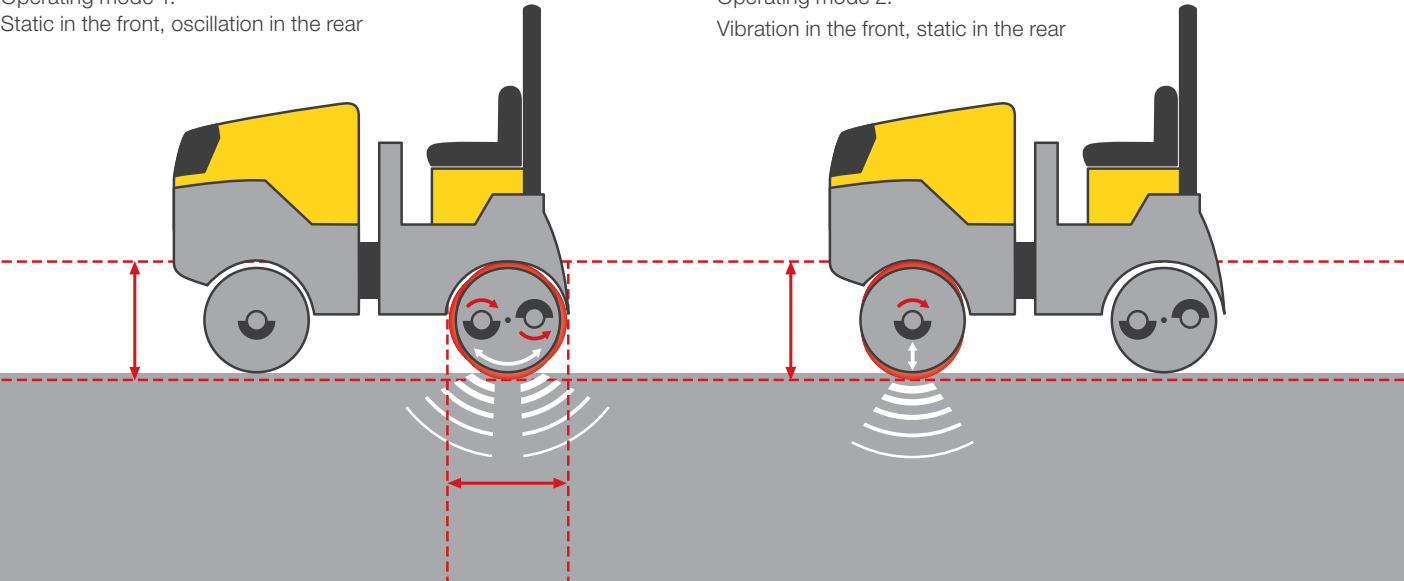

Larger time frame, higher surface capacity:

With oscillation, you can also compact at low material temperatures. Compared to compaction with vibration you thus have a larger time window.

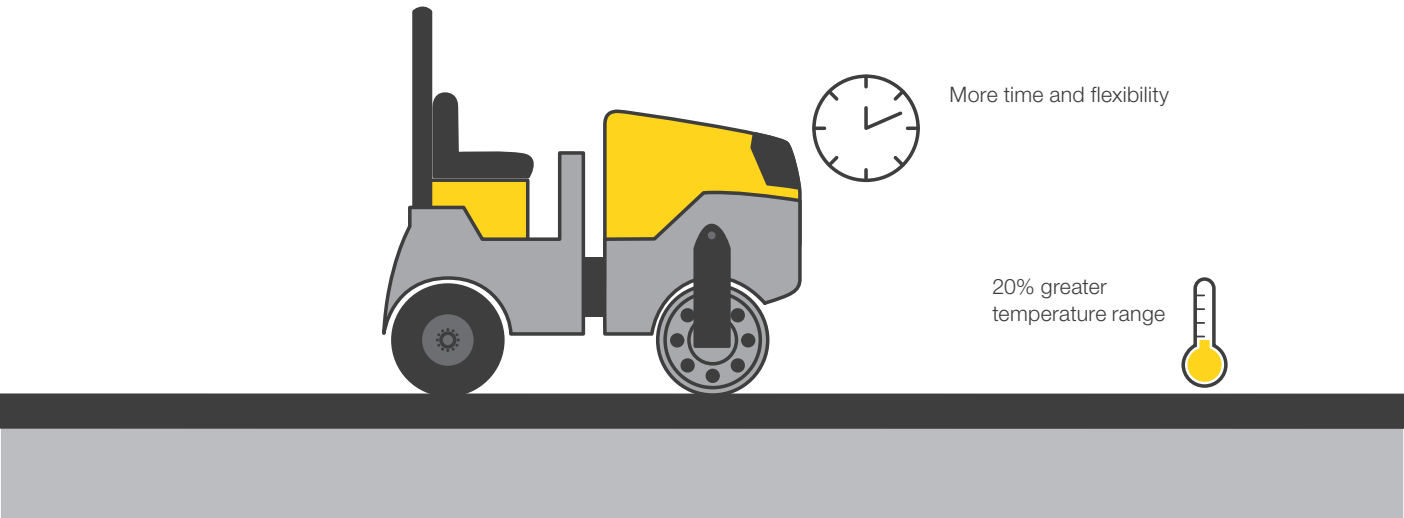

Single drum soil compactors RC50, RC70.

A perfect view in all directions makes working with the Wacker Neuson single drum soil compactors RC50 and RC70 safer and comfortable. Thanks to the compact design, the operator always has the working area and the drums in view from his seat. With a large departure angle and excellent gradeability, it is easy to maneuver even in uneven terrain. The simple operation via an intuitively designed display and joystick also make working easier and ensure that the operator is familiar with the machine in no time.

Efficiency

- Uniform operating concept for all RD and RC rollers prevents lengthy instructions
- Operator panel has a language-neutral, purely graphical and thus intuitive interface
- Due to the drive system with wheel motors, no axle is necessary as a connection between the wheels
- The low center of gravity combined with high ground clearance ensures good handling even on uneven terrain
- Eco-mode switch reduces the engine rpm (but also the compaction performance) and thus saves up to 20% fuel during transport trips

Performance

- Hydraulic traction control (automatic slip control) provides extremely good gradeability



Comfort

- The compact design allows a good view of the drums at all times and simplifies maneuvering and driving up to the walls
- The work platform is vibration decoupled and ergonomically designed

Maintenance


- The engine switches off automatically after a preset time, thus reducing operating hours and extending maintenance intervals



Eco-Mode for up to 20% fuel savings.



Traction control ensures that the wheels do not spin even on uneven terrain.

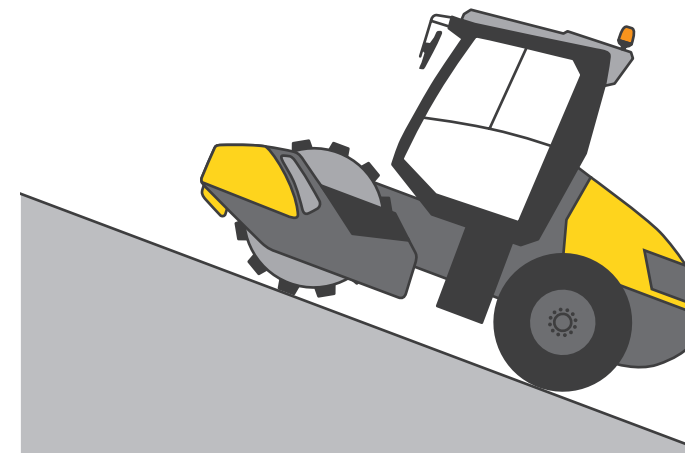


Master up to a 60% gradient: thanks to the powerful wheel drive.



Comfort for the operator: The seat and steering column can be individually adjusted.

The advantages of the tandem and combination single drum soil compactors in detail.

With the five compact tandem and combination single drum soil compactors, we have the right solution for you for various gradients, requirements and spatial conditions. In addition, the operator's cab can be outfitted to meet your individual needs.

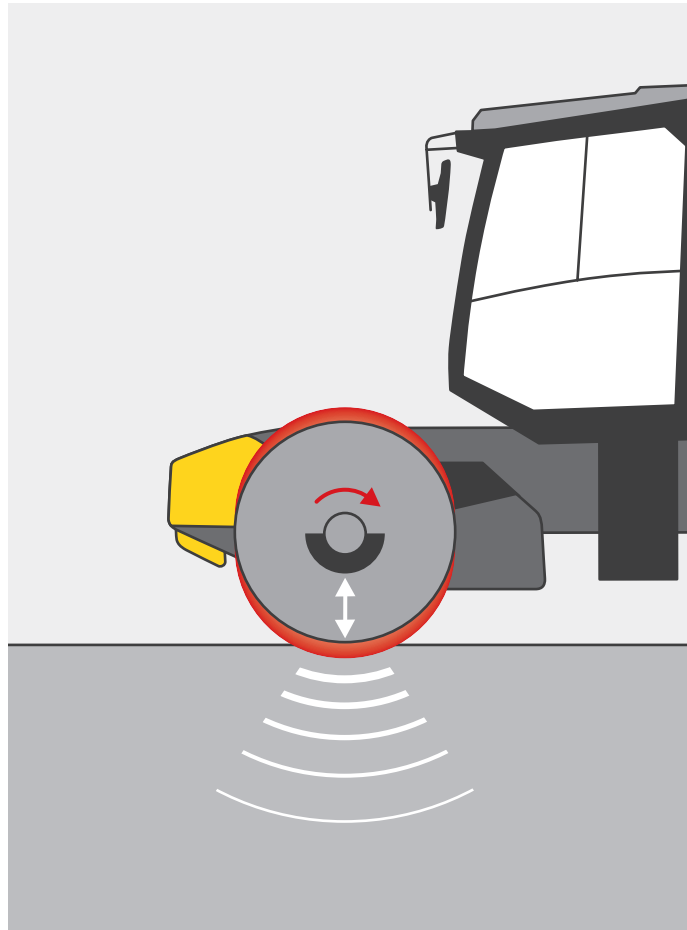


The smooth drums of the single drum soil compactors - RC50, RC70 and RC70vo.

Due to the low depth effect, the smooth drum is ideal for applications in sensitive areas, e.g. near vibration-sensitive structures like historic buildings or on surfaces under which tubes and utility lines run.

In addition, smooth drums are ideal for:

- Non-cohesive or weakly cohesive soils, such as sand and gravel
- Surfaces that have already been processed with a cleated (padfoot) drum roller

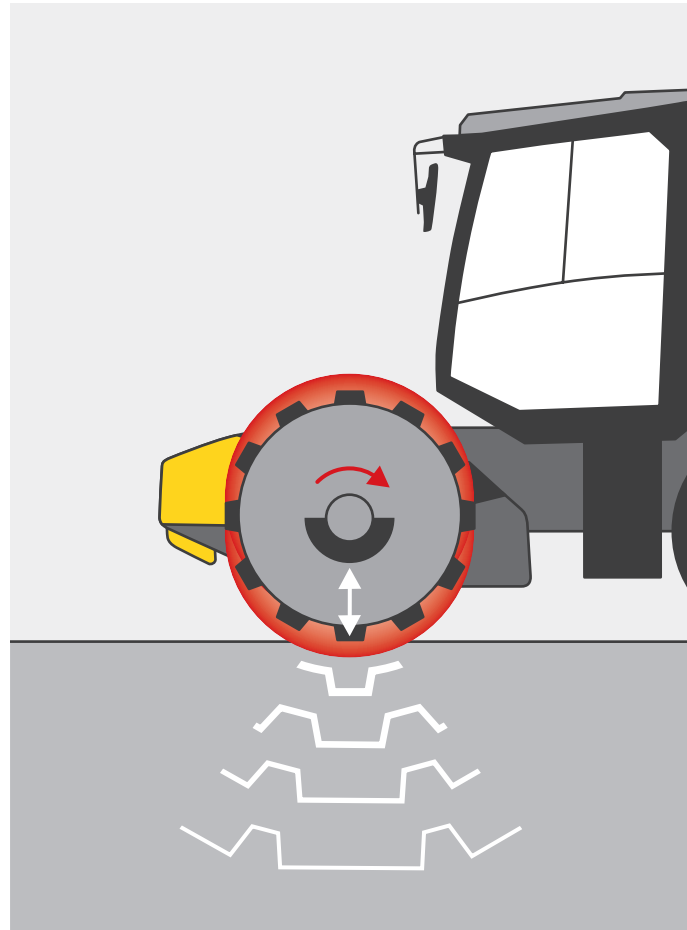

The cleated (padfoot) drums of the single drum soil compactors - RC50P and RC70P.

The trapezoid-shaped pads of a cleated drum compact the ground through kneading and crushing. The further the compaction progress, the less the pads sink into the ground.

The application areas of cleated drums are:

- Fine-grained soils with a high water content, incorporation of binding materials, such as lime or cement, into acidic soils
- Compaction of cohesive, less supportive moist ground, as well as friable soft stone (e.g. when building dams)

One single drum soil compactor, two types of compaction – RC70vo.


All tandem and combination single drum soil compactors compact through vibration – but the RC70vo offers you a special extra: You can use it to choose between the vibration and oscillation operating modes.

Type of compaction 1:

Vibration for high compaction depth.

Type of compaction 2:


Oscillation for optimal surface compaction.

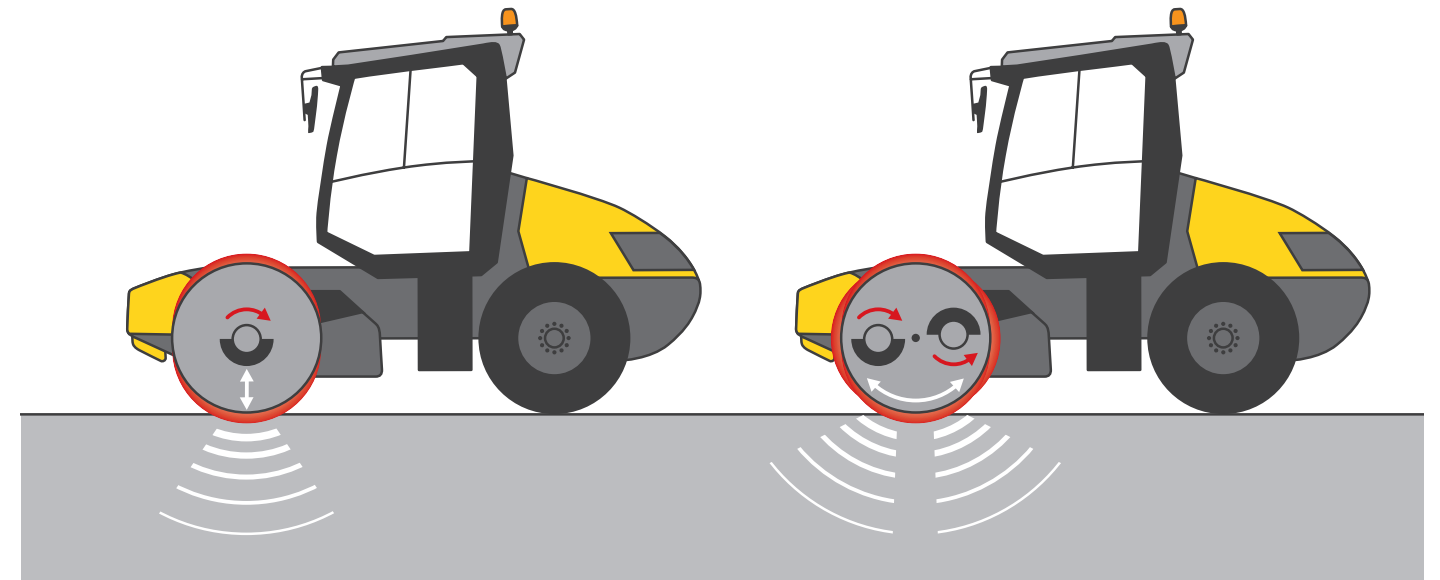

Three-point articulated pendulum joint.


Even the tandem- and combination single drum soil compactors are equipped with a three-point articulated-pendulum joint. It distributes the weight evenly between drums and wheels. It also minimizes the risk of tipping over even at full steering angle and ensures consistently good compaction results.

In uneven terrain, the low center of gravity of the tandem- and combination single drum soil compactors ensure stable straight-ahead travel and safe maneuvering. The pendulum support in the joint protects the operator by damping of the operator's cab.

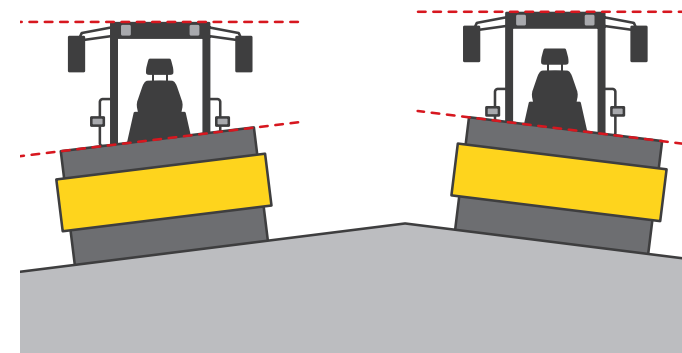

Uneven ground conditions, quiet cabin:

The pendulum support has a damping effect.

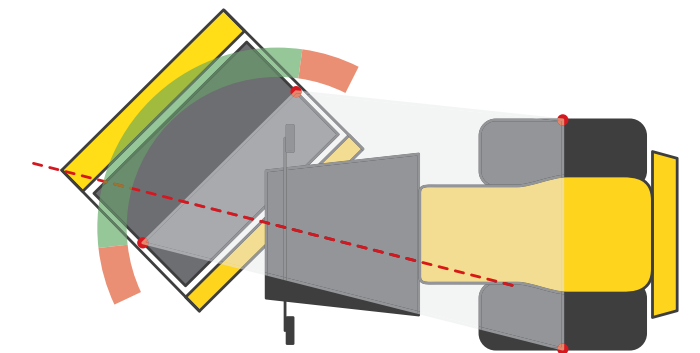

Tip-safe in curves:

Thrusting force distribution always in the green range.

Trench, tandem and combination rollers.

	Unit	RTX-SC3	RD7H	RD7He	RD7A	RD7Ye	RD18-80	RD18-100	RD18-100c	RD24e	RD28e	RD24-100	RD24-100c	RD24-100o	RD28-120	RD28-120c	RD28-120o	RD40-130	RD40-130c	RD40-130o	RD45-140	RD45-140c	RD45-140o
Max. operating weight	kg	1,465	735	735	690	710	1,840	1,950	1,830	3,000	3,410	3,190	3,110	3,240	3,410	3,320	3,470	4,920	4,790	5,230	5,300	4,960	5,640
Operating weight with roll over protection system	kg	–	–	–	–	–	1,580	1,670	1,630	2,615	2,695	2,475	2,385	2,525	2,695	2,595	2,755	3,965	3,825	4,015	4,345	3,995	4,435
Max. operating width	mm	820	650	650	650	650	856	1,056	1,000	1,110	1,250	1,050	1,050	1,050	1,250	1,220	1,250	1,350	1,338	1,350	1,430	1,380	1,430
Side overhang (left/right)	mm	–	30	30	30	30	–	–	–	–	55/55	55/55	55/55	55/55	55/55	55/55	55/55	63/63	63/63	63/63	63/63	63/63	63/63
Turning radius (inside)	mm	1,600	–	–	–	–	2,230	2,130	2,130	2,470	2,370	2,470	2,470	2,470	2,370	2,370	2,370	2,690	2,690	2,690	2,650	2,650	2,650
Drum type in front	–	cleated	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided
Drum type in rear	–	cleated	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	smooth/undivided	–	–	smooth/undivided	smooth/undivided	–	smooth/undivided	smooth/undivided	–	smooth/undivided	smooth/undivided	–	smooth/undivided	smooth/undivided	–	smooth/undivided
Tire size in rear	–	–	–	–	–	–	–	–	–	–	–	–	205/60-R15	–	–	9.5/65-15	–	–	–	–	–	10.5/80-16	–
Drive	–	Kohler KDW 1003	Single cylinder, 4-stroke, air-cooled, diesel engine, Hatz engine		Honda gasoline engine air-cooled, single cylinder-4-stroke-engine	Vertical cylinder, 4-stroke, air-cooled, diesel engine, Yanmar engine	Kubota diesel engine D1005			Electric motor	Electric motor	Kubota diesel engine D1503, with diesel particulate filter					Kubota diesel engine V2203, with diesel particulate filter						
Output	kW	14.8	7.5	7.5	8.7	6.8	16.8	16.8	16.8	16.8	24	24	24	24	24	24	24	37.4	37.4	37.4	37.4	37.4	37.4
Fuel tank capacity	l	24	5.4	5.4	5.4	5.4	33	33	33	33	42	42	42	42	42	42	42	73	73	73	73	73	73
Speed	km/h	2.5	4.5	4.5	4.5	4.5	0–11	0–11	0–11	0–11	0–12	0–12	0–12	0–12	0–12	0–12	0–12	0–11	0–11	0–11	0–11	0–11	0–11
Gradeability with/without vibration	%	45/50	26	26	26	26	30/40	30/40	30/40	30/40	35/40	30/40	30/40	35/40	30/40	30/40	35/40	30/40	30/40	30/40	30/40	30/40	30/40
Centrifugal force in front I/II	kN	68.4	22.5	22.5	22.5	22.5	25/16	25/16	25/16	25/16	46/28	46/28	46/28	46/28	52/32	52/32	52/32	64/39	64/39	64/39	64/39	64/39	64/39
Centrifugal force rear I/II	kN	68.4	22.5	22.5	22.5	22.5	25/16	25/16	–	–	–	46/28	–	–	52/32	–	–	–	–	–	64/39	–	–
Water tank capacity	l	–	60	60	60	60	70	70	70	70	180	180	180	180	180	180	180	285	285	285	285	285	285

Equipment and options (selection) for tandem and combination rollers.

	RD18	RD24	RD28	RD40	RD45
CE conformity	●	●	●	●	●
Warning signs, DIN/ISO	●	●	●	●	●
Scraper bar, fold-down	●	●	●	●	●
Roll-over protective structure, fold-down	●	●	●	●	●
Black artificial leather operator's seat	●	●	●	●	●
Engine stop automatics	●	●	●	●	●
Trailer hitch	–	○	○	○	○
Hydraulic oil, standard	●	●	●	●	●
Hydraulic oil, biodegradable	○	○	○	○	○
Belt guard	●	●	●	●	●
Antifreeze injection	○	○	○	○	○
Edge pressing and cutting equip. front right	–	○	○	○	○
Cutting wheel, diameter of 350 mm	–	○	○	○	○
Drum edge lighting, LED	–	○	○	○	○
Pressure roll 45 degrees, 5 cm layer	–	○	○	○	○
Pressure roll 60 degrees, 5 cm layer	–	○	○	○	○
Track indicator	–	○	○	○	○

● Standard ○ Option – not available

Tandem and combination rollers.

	RD18	RD24	RD28	RD40	RD45
Water sprinkling for edge pressing and cutting machine	–	○	○	–	–
Complete crushed stone spreader, precision roller spreader	–	○	○	○	○
Reverse operation alarm, volume-regulating	●	●	●	●	●
Lighting StVZO [Road Traffic Licensing Regulations]	●	●	●	●	●
Work lighting on roll over protection system, 4-fold, LED	○	–	–	–	–
Work lighting on roll over protection system, 4-times, halogen	–	○	○	○	○
Rotating beacon on roll over protection system	●	●	●	●	●
Acoustic insulation (proofing)	○	○	○	○	○
Flow divider	–	○	○	○	○
TÜV approval	○	○	○	○	○

Trench roller.

	RTX-SC3
Smooth drums	○
Long scraper bar	○
Short scraper bar	●

Explanation of nomenclature
○ = Oscillation roller
c = Combination roller

Single drum soil compactors.

	Unit	RC50	RC50p	RC70	RC70p	RC70vo
Max. operating weight	kg	5,710	5,530	7,580	6,920	6,380
Operating weight with roll over protection system	kg	4,815	4,935	6,320	6,190	6,105
Max. operating width	mm	1,370	1,370	1,680	1,680	1,680
Side overhang left/right	mm	65/65	65/65	80/70	80/70	80/70
Turning radius (inside)	mm	3,375	3,375	3,310	3,310	3,310
Type of drum	–	smooth/undivided	sheepsfoot	smooth/undivided	sheepsfoot	smooth/undivided
Tire size in rear	–	TR 12.4-24 8 PR	TR 12.4-24 8 PR	AW 14.9-24 8 TL	TR 14.9-24 8 TL	AW 14.9-24 8 TL
Drive	–	Kubota diesel engine V3307-CR-T				
Output (ISO 14396)	kW	55.4	55.4	55.4	55.4	55.4
Fuel tank capacity	l	123	123	123	123	123
Infinitely variable speed	km/h	0–12.5	0–12.5	0–12.5	0–12.5	0–12.5
Gradeability with/without vibration	%	55/60	55/60	55/60	55/60	55/60
Centrifugal force in front I/II	kN	69	69	125/95	125	123

Equipment and options (selection) for single drum soil compactors.

	RC50	RC50p	RC70	RC70p	RC70vo
Paint 1 RAL color + gray	○	○	○	○	○
Rigid steering column	●	●	●	●	●
Tiltable steering column	○	○	○	○	○
Diamond tread tire set	●	○	●	○	●
Set of tires with tractor tread	○	●	○	●	○
CE conformity	●	●	●	●	●
Warning signs, DIN/ISO	●	●	●	●	●
Scraper bar	○	●	○	●	○
Rigid roll over protection system, with canopy	●	●	●	●	●
Roll over protection system cab with heater, FOPS tested (Level I), 1 access door	○	○	○	○	○
Air-conditioning system	○	○	○	○	○

● Standard ○ Option – not available

All information relates to the base machine. Subject to changes.
The product range of Wacker Neuson includes over 300 different product groups with different versions.
The product data may vary accordingly with the selection of different options.

The Wacker Neuson products shown are examples and as such are subject to regular changes.
We are happy to make you a specific offer upon request!

Reproduction only with the written approval of Wacker Neuson.

© Wacker Neuson SE

Configuration options.

Single drum soil compactors.

	RC50	RC50p	RC70	RC70p	RC70vo
Standard forward + reverse travel lever	●	●	●	●	●
Forward + reverse travel lever with selection of dozer blade	○	○	○	○	○
Black artificial leather operator's seat	●	●	●	●	●
Black artificial leather operator's seat, comfort outfitting	○	○	○	○	○
Right/left seat adjustment	○	○	○	○	○
Hydraulic oil, standard	●	●	●	●	●
Hydraulic oil, biodegradable	○	○	○	○	○
Radio	○	○	○	○	○
Rigid roll over protection system	○	○	○	○	○
Synthetic material canopy with integrated FOPS (Level I)	○ ¹	○ ¹	○ ¹	○ ¹	○ ¹
Dozer blade	○	○	○	○	–
Two-part cleated shells, not mounted	○	–	○	–	–
Spare tire set with tractor tread	○	○	○	○	○
Spare tire set, all-weather	○	○	○	○	○
Earthworks compaction control	○	○	○	○	○
Speedometer	○	○	○	○	○
Engine stop automatics	○	○	○	○	○
Vibration frequency display	○	○	○	○	○
Rear-view camera	○ ²	○ ²	○ ²	○ ²	○ ²
Reverse operation alarm, volume-regulating	●	●	●	●	●
Vibration automatic	○	○	○	○	○
Lighting StVZO [Road Traffic Licensing Regulations]	● ³	● ³	● ³	● ³	● ³
Work lighting, 4-fold, halogen	○	○	○	○	○
Work lighting, 4-fold, LED	○	○	○	○	○
Rotating beacon	●	●	●	●	●
Battery disconnecter switch, electronic	○	○	○	○	○
TÜV approval	○	–	○	–	○

● Standard ○ Optional – not available

¹ Only available with selection "Rigid roll over protection system"
² Not available with selection "Rigid roll over protection system"
³ Mandatory with selection "TÜV approval"

Explanation of nomenclature
vo = Vibration or oscillation adjustable
p = Roller with cleated drum

Wacker Neuson – all it takes.



Concrete technology



Vibratory rammers



Vibratory plates



Rollers



Demolition technology



Generators



Lighting



Pumps



Excavators



Wheel loader(s)



Telehandler



Dumpers



Financial solutions



Repair & maintenance



Academy



EquipCare & EquipCare Pro



Rental



Concrete specialists



eStore



Spare parts



Used machines



ConcreTec



wackerneuson.com



Facebook
wackerneuson



Instagram
@wackerneuson



YouTube
Wacker Neuson



LinkedIn
Wacker Neuson



TikTok
@wacker.neuson



WN EMEA.10379.V02.EN-US

08/2023 EN