



## WL60

### Wheel Loader

High productivity and ideal comfort

The WL 60 wheel loader offers an extremely comfortable cab and a wide variety of options. The operating philosophy is designed for ergonomics. Everything is well within the operator's reach, which ensures fatigue-free work even over a longer period of time. The high flow load-sensing performance hydraulics with 150 l/min flow rate is the strongest in the 6 t class, also ensuring more operating comfort and less fuel consumption by the machine.



### Highlights

- {30/40 km/h}{18.64/24.85 mph} speed
- The wheel loader as an attachment carrier
- Clear 3.5-inch digital display
- Comfortable working environment
- Joystick console spring-mounted on the operator's seat

### Technical Data

#### ■ Hydraulic

|                    |             |
|--------------------|-------------|
| Operating pressure | 210.0 bar   |
| Flow rate          | 100.0 l/min |
| Tank capacity      | 95.0 l      |

#### ■ Mechanical - Output Details

|                       |                 |
|-----------------------|-----------------|
| Travel speed          | 20.0 km/h       |
| Travel speed stage 1  | 0.0 - 7.0 km/h  |
| Travel speed stage 2  | 0.0 - 20.0 km/h |
| Travel speed (Option) | 40.0 km/h       |

#### ■ Mechanical Details

|                  |            |
|------------------|------------|
| Operating weight | 5,900.0 kg |
|------------------|------------|

|                 |                     |
|-----------------|---------------------|
| Bucket capacity | 1.00 m <sup>3</sup> |
|-----------------|---------------------|

#### ■ Environment Data

|                             |            |
|-----------------------------|------------|
| Sound level L <sub>pA</sub> | 75.0 dB(A) |
|-----------------------------|------------|


#### ■ Operating Fluids

|                             |         |
|-----------------------------|---------|
| Hydraulic fluid volume      | 125.0 l |
| Tank capacity AdBlue® / DEF | 19.0 l  |
| Fuel Tank capacity          | 105.0 l |

#### ■ Chassis

|                    |             |
|--------------------|-------------|
| Operating pressure | 455.0 bar   |
| Flow rate          | 156.0 l/min |

## Dimensions

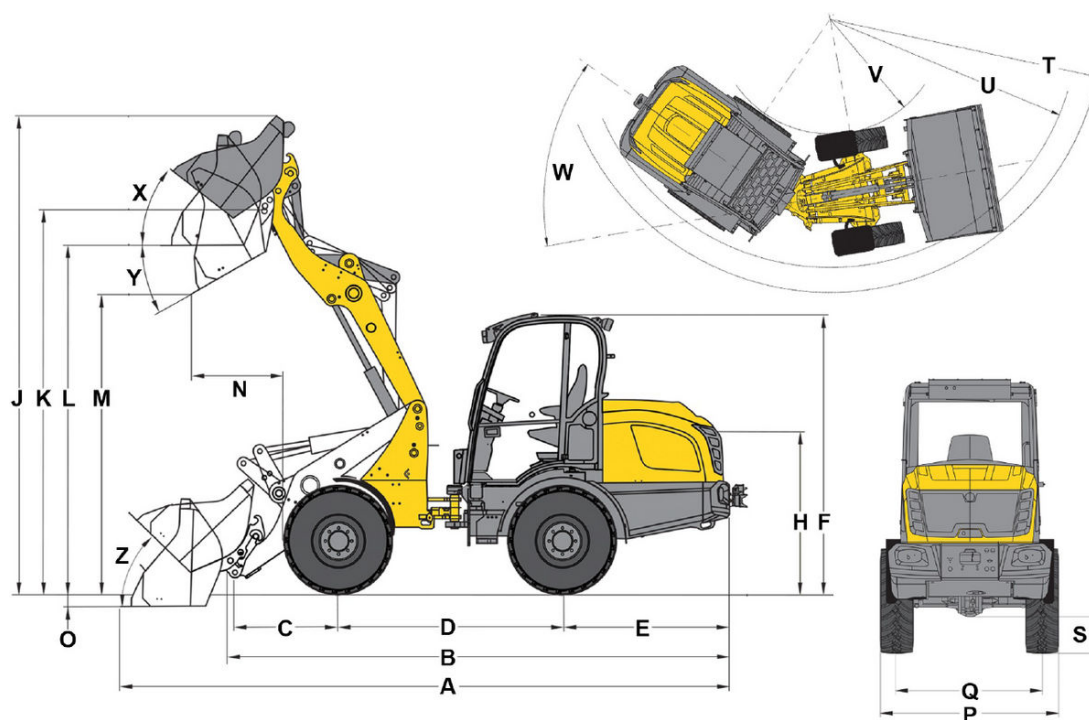

|   |  |          |
|---|--|----------|
| A | Total length                           | 5,898 mm |
| B | Total length without bucket            | 4,780 mm |
| C | Bucket pivot point (to center of axle) | 991 mm   |
| D | Wheel base                             | 2,150 mm |
| E | Rear overhang                          | 1,676 mm |
| F | Height with cab                        | 2,693 mm |
| H | Seat height                            | 1,609 mm |
| J | Total working height                   | 4,409 mm |
| K | Bucket pivot point (max. lift height)  | 3,686 mm |
| L | Load-over height                       | 3,375 mm |
| M | Dumping height                         | 2,841 mm |
| N | Reach (at M)                           | 290 mm   |
| O | Digging depth                          | 74 mm    |
| P | Total width                            | 1,829 mm |
| Q | Track width                            | 1,422 mm |
| S | Ground clearance                       | 375 mm   |
| T | Maximum radius                         | 4,072 mm |
| U | Radius on the outer edge               | 3,686 mm |
| V | Inner radius                           | 1,666 mm |
| W | Articulation angle                     | 42 °     |
| X | Rollback angle at max. lift height     | 33 °     |
| Y | Dumping angle                          | 33 °     |
| Z | Rollback angle on ground               | 39 °     |